



Power Amplifier

Model: PA-50K-6G-2

0.05-6000MHz 2W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 0.05-6000MHz
- High output power at saturation, 2W Typ.
- High gain, 33 dB Min.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-50K-6G-2 is a power amplifier with a minimum small signal gain of 33 dB and a nominal P_{sat} of 2W across the frequency range of 0.05 to 6000MHz. The DC power requirement for the amplifier is +28 VDC/600 mA. The input and output port configuration offers coax adapter structure with SMA female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	0.05		6000	MHz
Small Signal Gain	33	34		dB
Small Signal Gain Flatness			±4	dB
Output P1dB		30		dBm
Output Psat	32	33		dBm
Harmonic			-10	dBc
Input VSWR		1.5	2.0	:1
DC Voltage		+28		V DC
DC Supply Current		600		mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-40°C to +60°C	
Non-operating Temperature*	-50°C to +70°C	
Relative humidity	95%	
RF Input/Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Altitude	30,000	feet
Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	120*80*22	mm
Weight	200	g

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+30 V
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-50K-6G-2

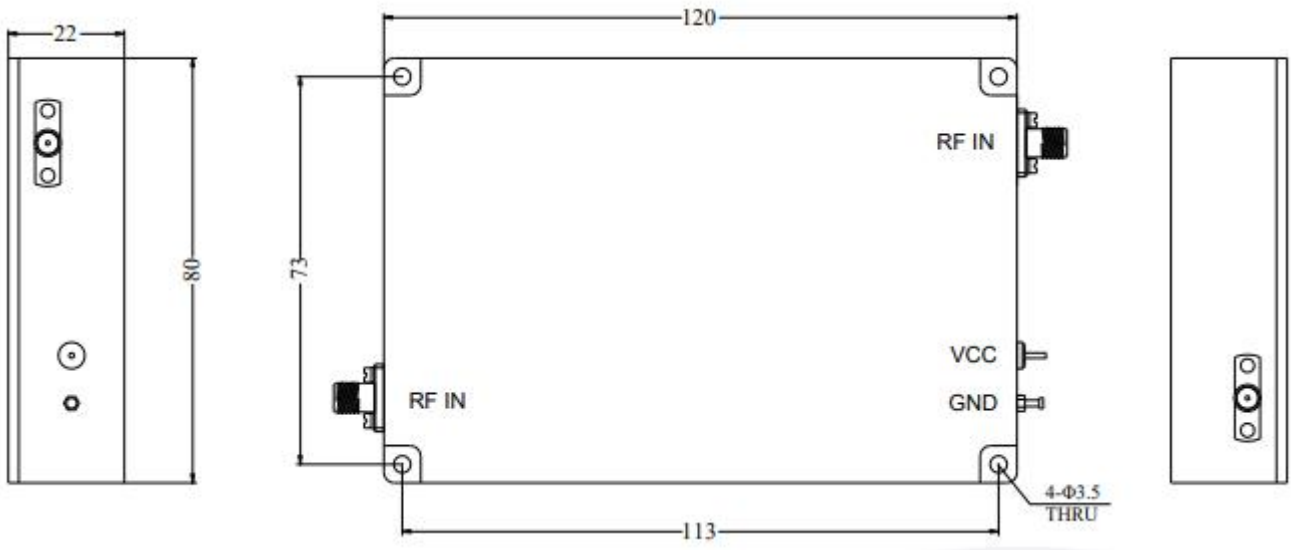


Ordering Information:

Base Number	Description	Optional
PA-50K-6G-2	Power Amplifier, 0.05-6000MHz, Gain:33dB,Psat:2W,+28V DC	Without Heatsink
PA-50K-6G-2-HS	Power Amplifier, 0.05-6000MHz, Gain:33dB,Psat:2W,+28V DC	With Heatsink




Typical Performance Data:

Input VSWR vs Frequency

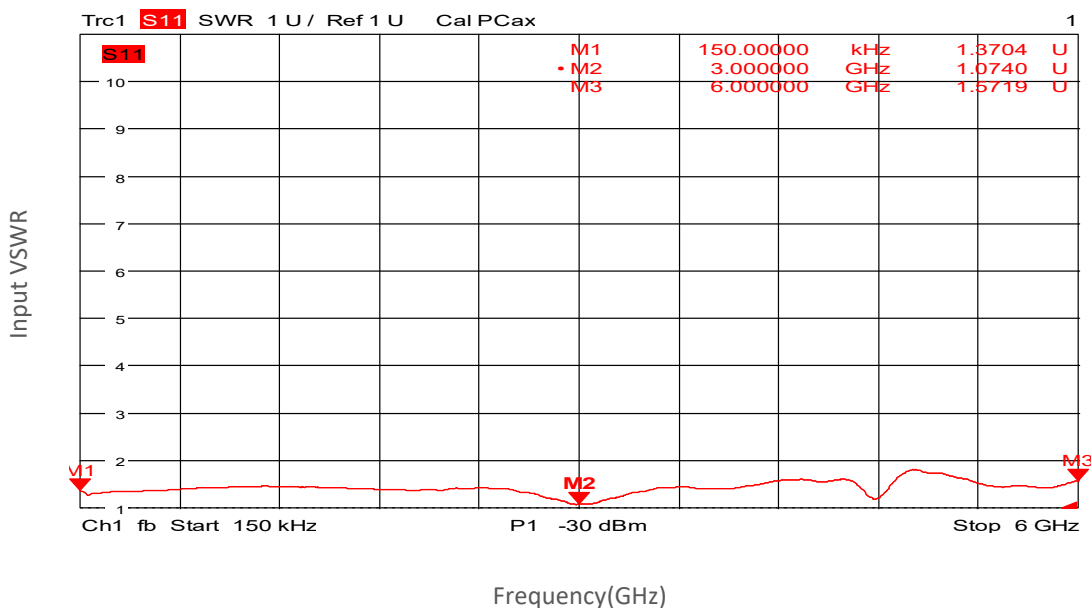

Small Signal Gain vs Frequency

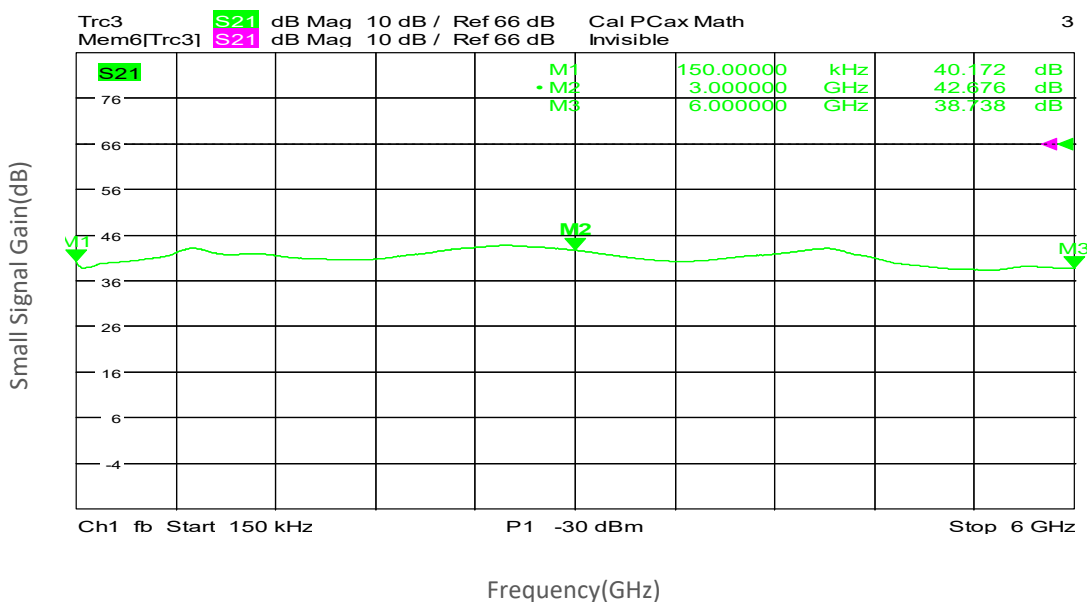


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Gain vs Output Power

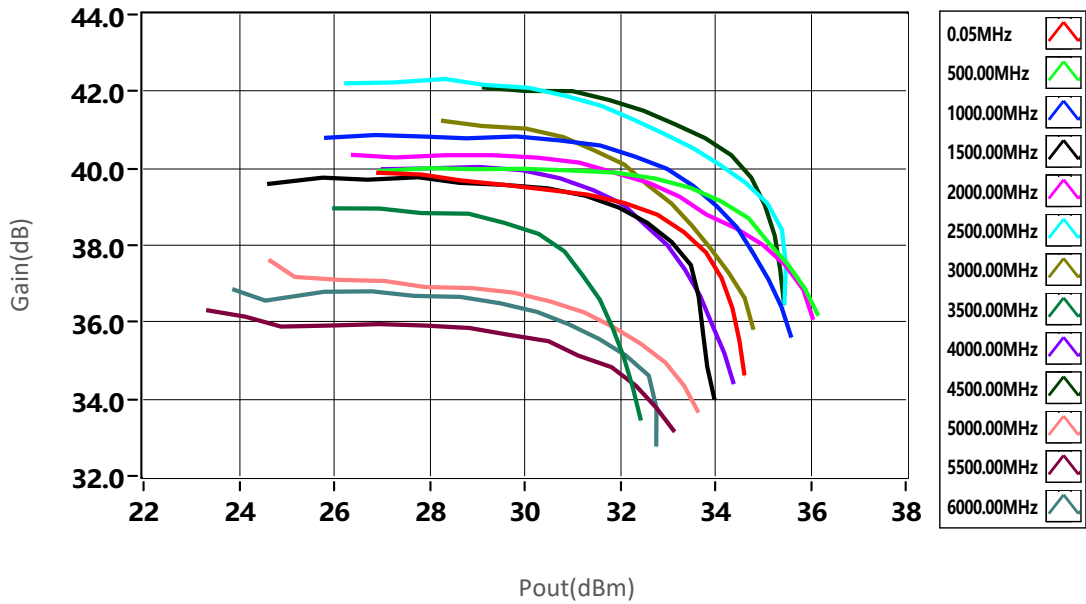

P1dB vs Frequency

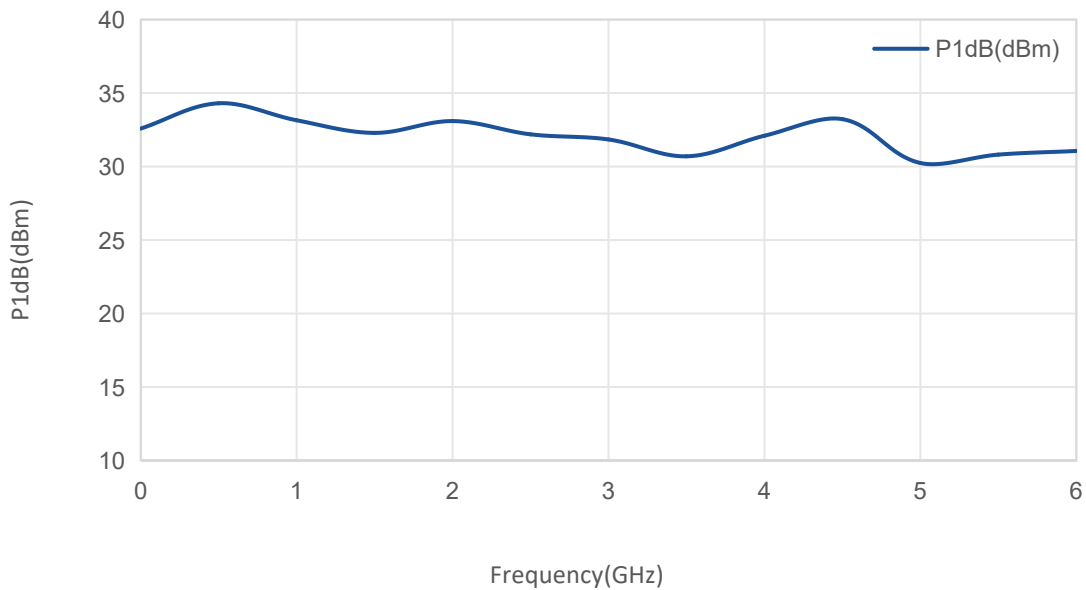


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Psat vs Frequency

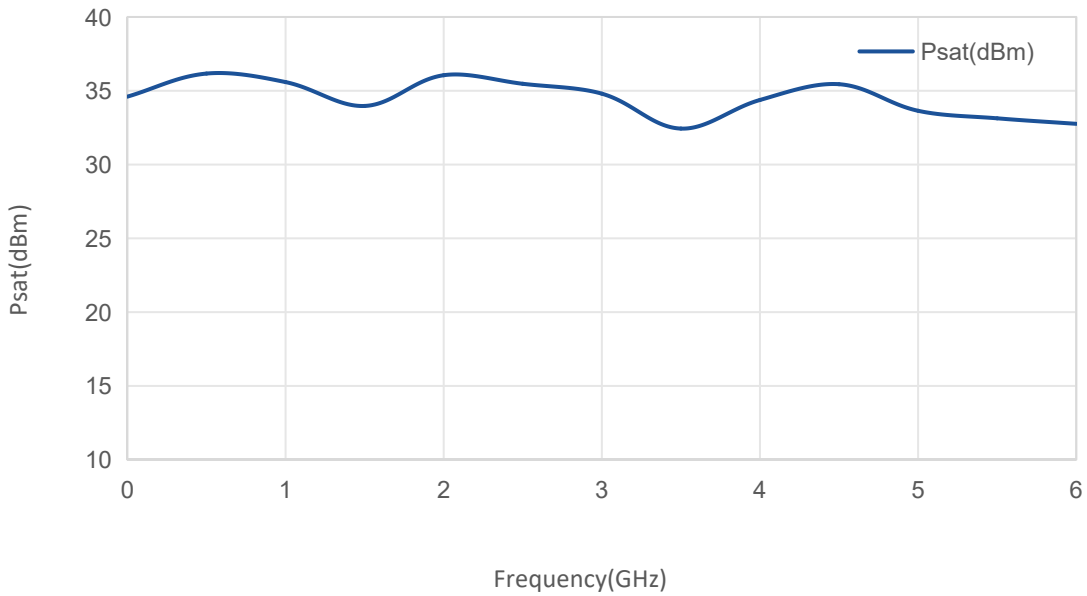

Harmonic vs Frequency

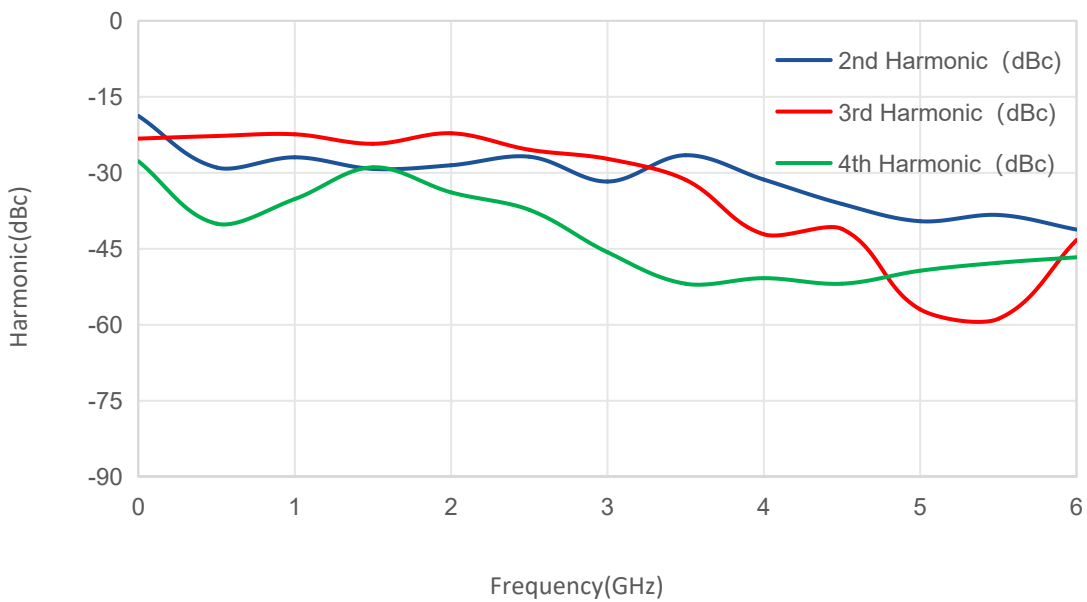

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.