



Power Amplifier

Model: PA-1G-6G-100

1-6GHz 100W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 1-6GHz
- High output power at saturation, 100W Min.
- High gain, 52 dB Typ.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-1G-6G-100 is a power amplifier with a typical small signal gain of 52 dB and a minimum P_{sat} of 100W across the frequency range of 1 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/3 A. The input port configuration offers coax adapter structure with SMA female and output port configuration offers coax adapter structure with N female.



Electrical Specifications at 25°C:

| Parameter | Min | Typ | Max | Units |
|-------------------|-----|-----|-----|-------|
| Frequency range | 1 | | 6 | GHz |
| Small Signal Gain | 50 | 52 | | dB |
| Gain Flatness | | ±3 | ±5 | dB |
| Output Psat | 50 | 51 | | dBm |
| Harmonic | | -12 | | dBc |
| Input VSWR | | 1.5 | 2 | :1 |
| DC Voltage | +26 | +28 | +30 | V DC |
| DC Supply Current | | 3 | 22 | A |
| Impedance | | 50 | | Ohms |

Mechanical Specifications:

| Parameter | Value | Notes |
|---------------------------------|---|-------|
| Operating Temperature* | -20°C to +50°C | |
| Non-operating Temperature* | -30°C to +60°C | |
| Relative humidity | 95 | % |
| RF Input/Output Connector | SMA Female/N Female | |
| DC Supply Connector | DSUB-15 Female | |
| Altitude | 10,000 | feet |
| Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | |
| Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | |
| Dimensions W x H x D | 270*160*27 | mm |
| Weight | 2400 | g |

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


| Parameter | Value |
|-----------------------|----------------------|
| Supply Bias Voltage | +30 V |
| RF Input Power | +5 dBm |
| ESD sensitivity (HBm) | Class 0, passed 150V |



Outline Drawing:

Unit:mm

PA-1G-6G-100

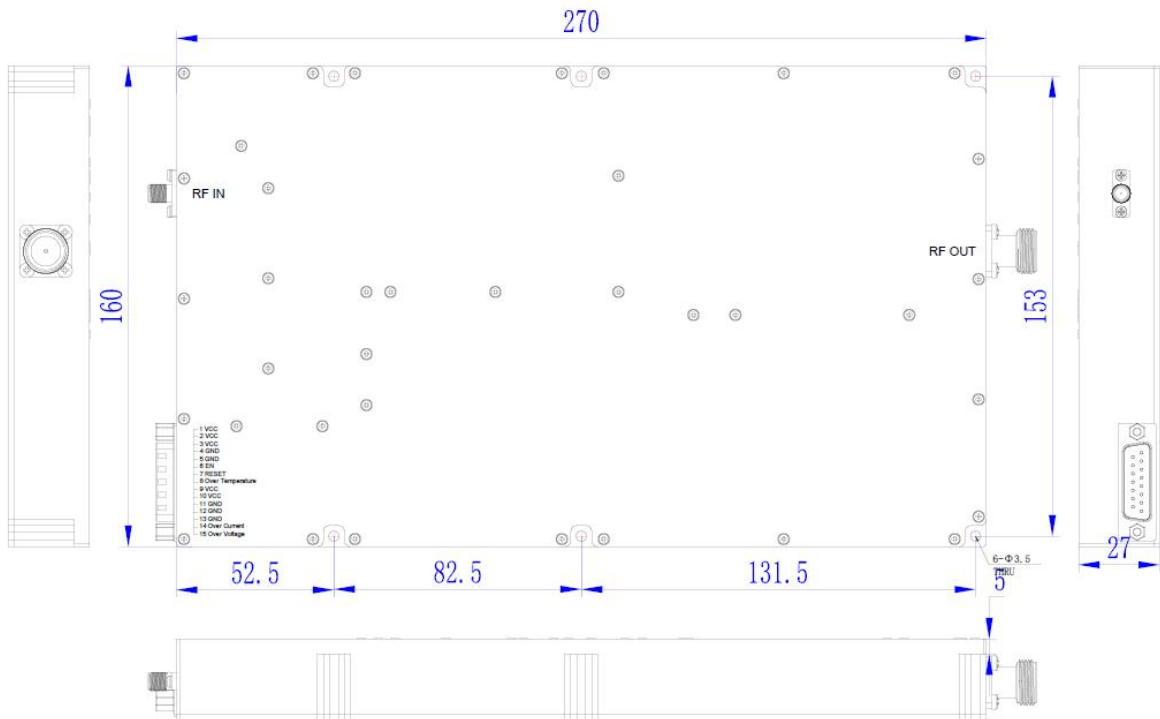

DC Supply Connector(DSUB-9 Female):

| Pin | Name | Function |
|-----|------|---|
| 1 | VCC | +26.0-30.0VDC |
| 2 | VCC | +26.0-30.0VDC |
| 3 | VCC | +26.0-30.0VDC |
| 4 | GND | Ground |
| 5 | GND | Ground |
| 6 | EN | Amplifier Enable: TTL High (5V) (Internally Pulled-High) |



DC Supply Connector(DSUB-9 Female):

| Pin | Name | Function |
|-----|------------------|--|
| 7 | RESET | Resets PA when logic LOW is applied and released (Internally Pulled-High) |
| 8 | Over Temperature | When the temperature of the case exceeds 85 °C, the power amplifier will turn off and this pin will be pulled high. If the temperature of case drops to 70 °C, the power amplifier will return to normal operation, and this pin will be pulled low. |
| 9 | VCC | +26.0-30.0VDC |
| 10 | VCC | +26.0-30.0VDC |
| 11 | GND | Ground |
| 12 | GND | Ground |
| 13 | GND | Ground |
| 14 | Over Current | Current FAULT:(TTL High= Fault, TTL Low =Normal) |
| 15 | Over Voltage | Voltage FAULT:(TTL High= Fault, TTL Low =Normal) |


Ordering Information:

| Base Number | Description | Optional |
|-----------------|---|------------------|
| PA-1G-6G-100 | Power Amplifier, 1-6GHz, Gain:52dB,Psat:100W,+28V DC | Without Heatsink |
| PA-1G-6G-100-HS | Power Amplifier, 1-6GHz, Gain:52dB,Psat:100W,+28V DC | With Heatsink |




Typical Performance Data:

Input VSWR vs Frequency

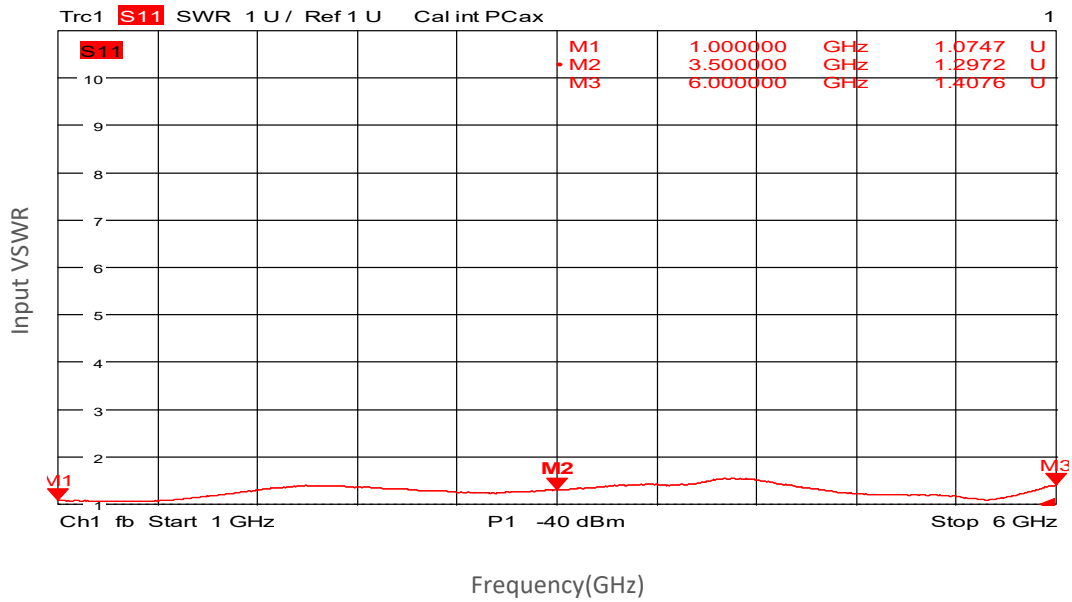

Small Signal Gain vs Frequency

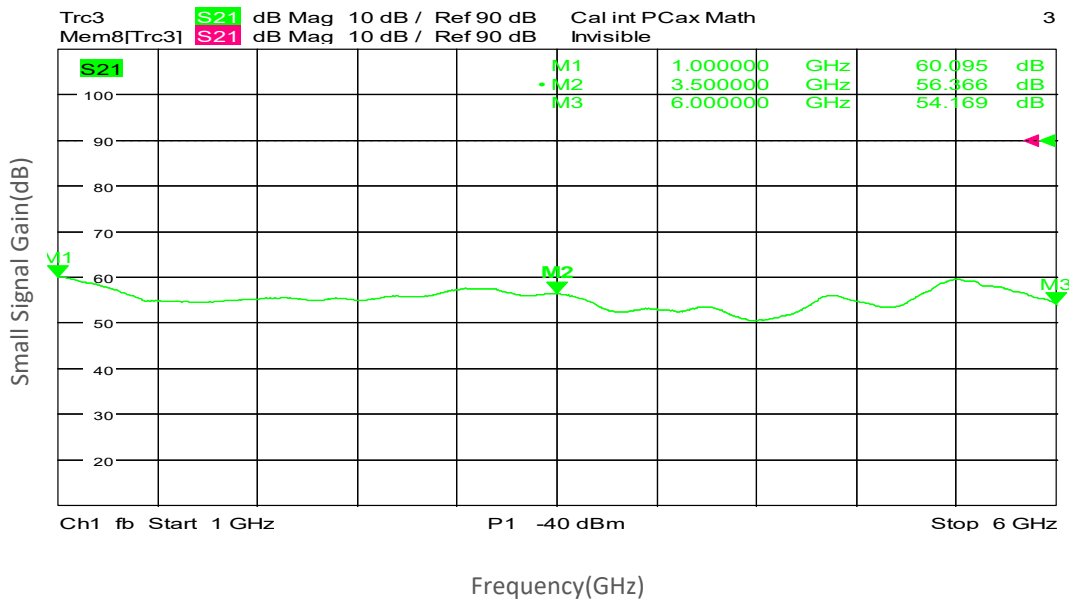


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Gain vs Output Power

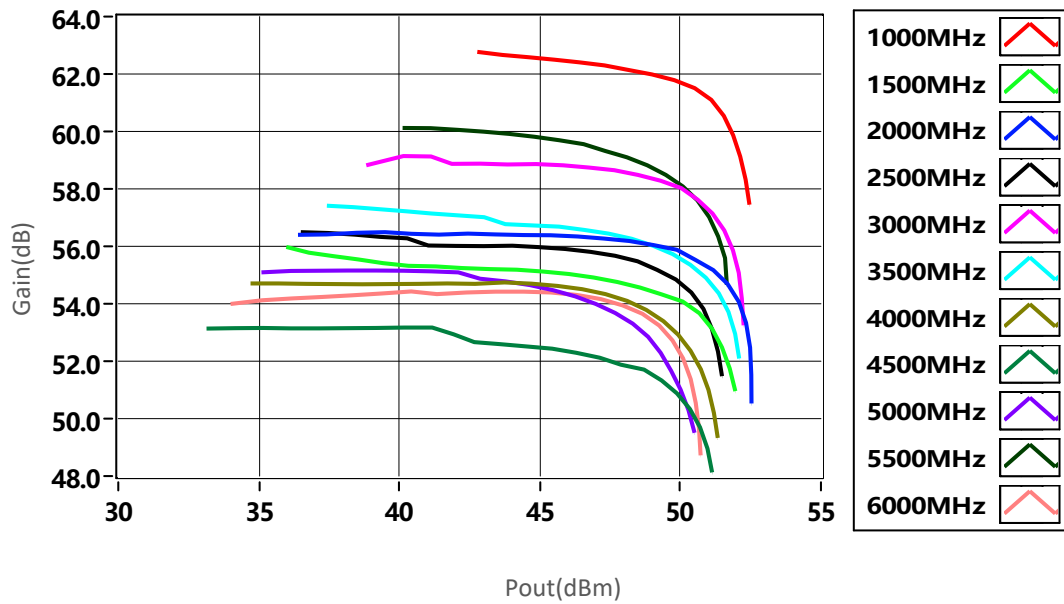

P1dB vs Frequency

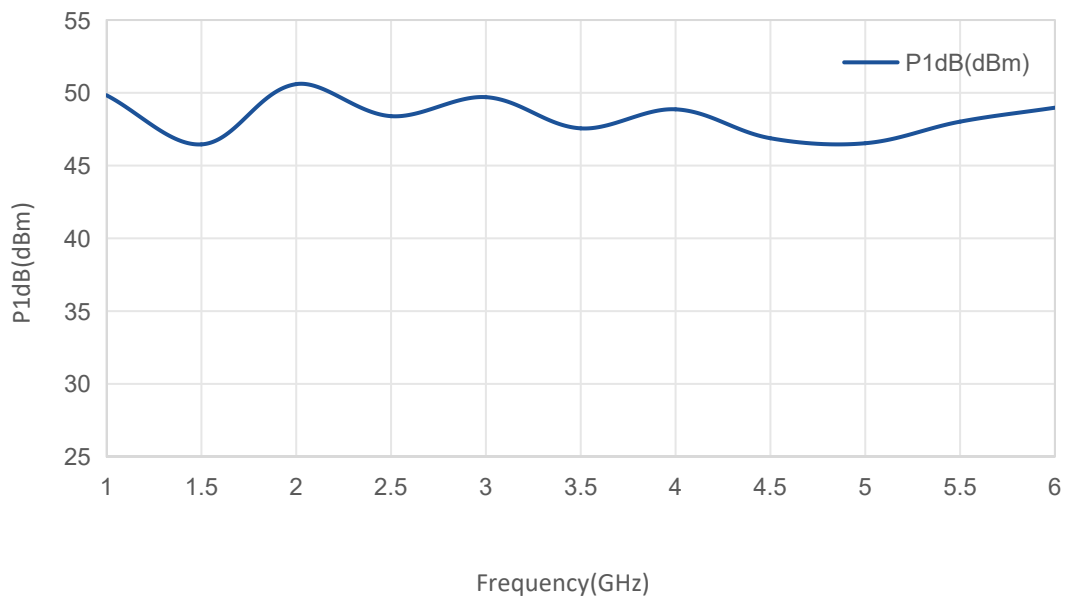


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Psat vs Frequency

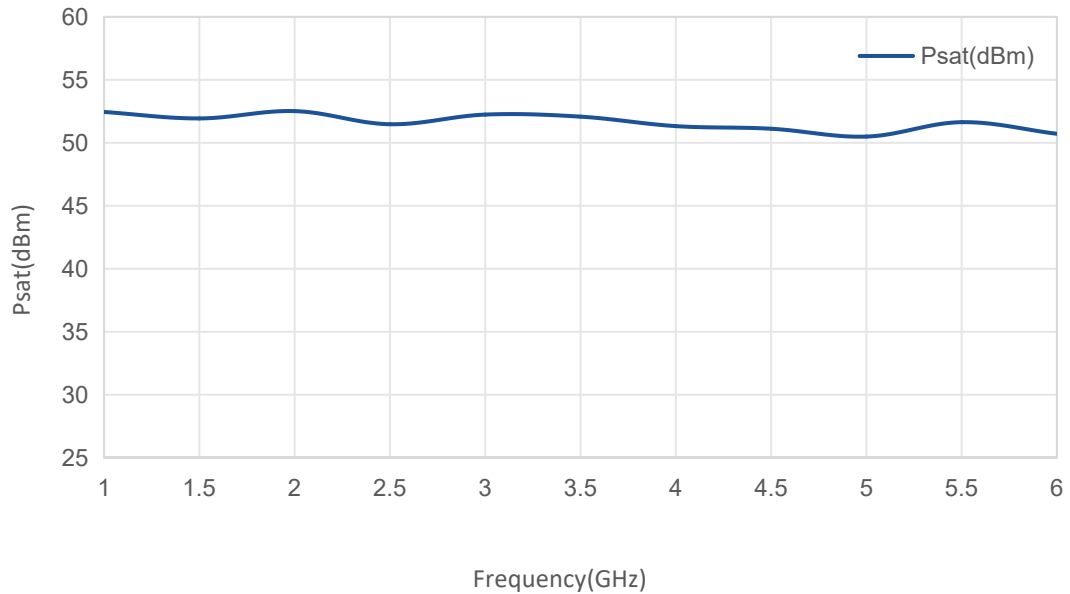

Harmonic vs Frequency

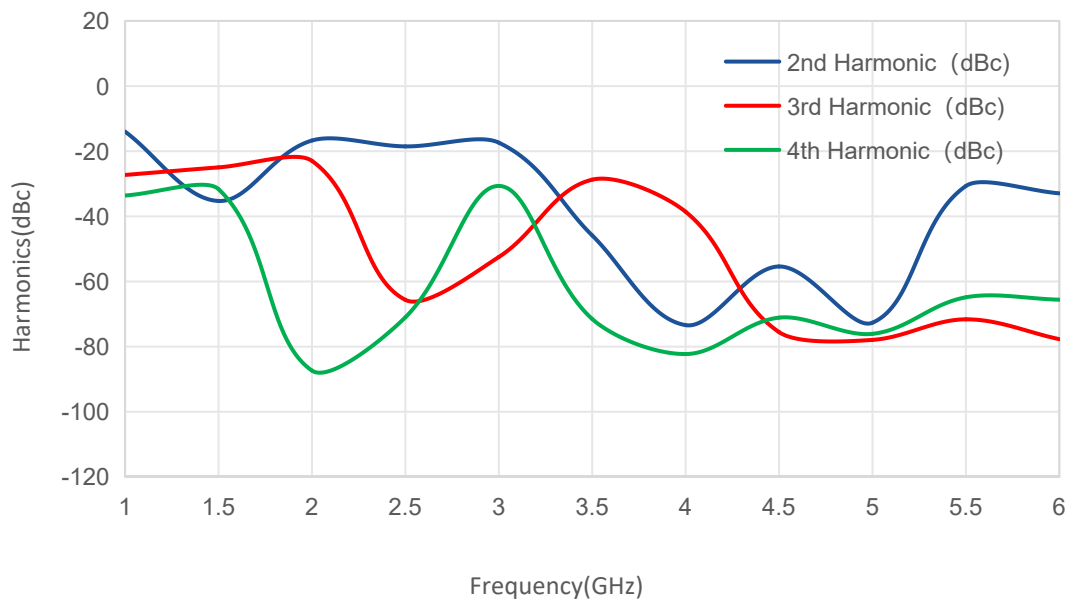

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.