



High Power Amplifier

Model:RPA-8G-12G-4000-P

8-12GHz 4000W Pulse

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 8-12GHz
- High output power at saturation, 66dBm Min.
- High gain, 66dB Min.
- Operates from AC line power: 380V

Applications:

- Laboratory test instrument
- RF Power stress test
- EMI and antenna testing
- Reliability testing

Product Overview:

The RPA-8G-12G-4000-P is a high power, rack mount amplifier with a self-contained AC power supply which can be used for a wide variety of laboratory testing applications. This rugged amplifier is capable of amplifying signals up to 4000W output power over its entire operating bandwidth of 8 to 12GHz. The control functions RPA-8G-12G-4000-P possesses include the on/off of the power supply, on/off of the RF setting, adjustment of the gain and output power can be controlled by the automatic ALC system. Built-in safety features include fans alarms and automatic shut down mechanism to prevent damage in the event of excessive internal temperatures. The amplifier's output stage is further protected in the event of a fault condition, allowing high power operation for up to 5 minutes into an open or short load (refer to the maximum input power specifications). And it has built-in protection functions included over TEM, over voltage, over current, over VSWR(3:1). It can also be remotely controlled via RS422 or Ethernet.



Electrical Specifications at 25°C:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	8		12	GHz
Working Mode	MOD	PULSE ONLY			
Power Gain	GP	66			dB
Power Gain flatness@Pout=66dBm	ΔGL		±4		dB
Input Power	Pin		0	5	dBm
Pulse Off Isolation	Piso		80		dBc
Output Psat	Psat	66			dBm
Spurious@Pout=66dBm	Spur			-60	dBc
Harmonics@Pout=66dBm	HAM		-25	-15	dBc
Pulse Delay	Pd		250		ns
Modulation Signal Level (50Ω)	TTL	0		5	V
Modulation Frequency	MF	0.5		20	KHz
Pulse Width	T	0.3		300	us
Duty Cycle	τ			10	%
Rise/Fall Time(10% to 90%)	Tr		50	100	ns
Pulse Width Distortion	PWd		±50		ns
Pulse Drop@T=100us	Pdrop		0.5		dB
Ground Noise(Pulse on)	NL1		-66	-55	dBm/Hz
Ground Noise(Pulse off)	NL2		-140		dBm/Hz
Input VSWR	VSWRin			1.5	:1
Output VSWR	VSWRout		2.0		:1
AC Voltage	Vac	380 VAC, 50Hz			V AC
Power Consumption@5% duty cycle	Pdiss	2000			W
Power Consumption@10% duty cycle	Pdiss	4000			W
Impedance	I/O-IMP	50			Ohms



Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-20 to +40	°C
Non-operating Temperature*	-30 to +50	°C
Relative humidity	95	%
RF Input/Output Connector	N Female/WR90	
Forward/Reverse Coupling	N Female/N Female	
Digital Monitor & Control	Serial:RS422; Ethernet	Optional: GPIB
Pulse Input Connector	BNC Female	
Communication Connector	DB-9/RJ-45	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Cooling	Built in Cooling system,forced air cooling	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	19 Inch 11U*650 depth	
Weight	≤80	Kg

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

RPA-8G-12G-4000-P

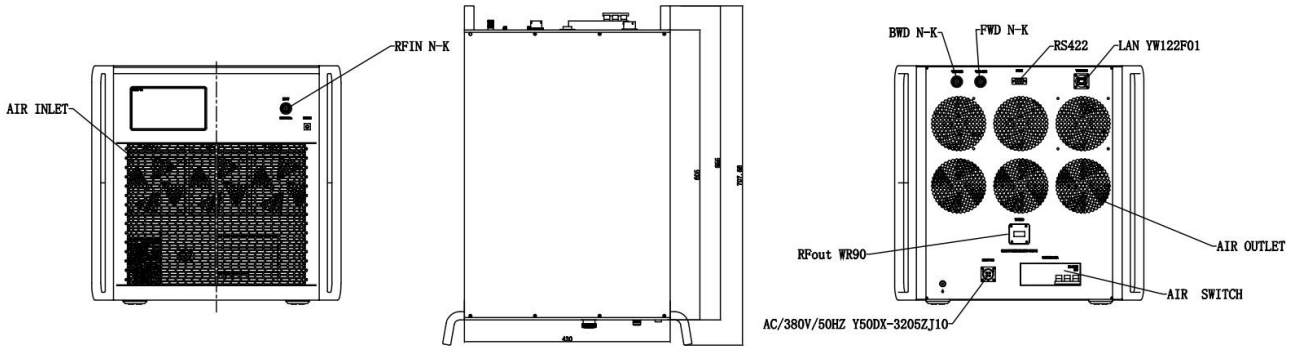

Optional items:

Number	Parameter
1	LCD display touchscreen
2	Ingress protection grad
3	Customized operating temperature range
4	Built in Cooling system(air or liquid)
5	Types of RF,coupling and monitor&control interfaces

Outline Drawing:

Base Number	Description	Optional
RPA-8G-12G-4000-P	High Power Amplifier, 8-12GHz, 4000W Pulse, Built in air or liquid cooling, without LCD and IP grad.	Basic version
RPA-8G-12G-4000-P-M	High Power Amplifier, 8-12GHz, 4000W Pulse, Built in air or liquid cooling, with LCD.	Add LCD display touchscreen
RPA-8G-12G-4000-P-IPxx	High Power Amplifier, 8-12GHz, 4000W Pulse, Built in air or liquid cooling, with LCD and IP grad.	Add Ingress protection grad



Optional items:

Number	Parameter
1	LCD display touchscreen
2	Ingress protection grad
3	Customized operating temperature range
4	Built in Cooling system(air or liquid)
5	Types of RF,coupling and monitor&control interfaces

Outline Drawing:

Base Number	Description	Optional
RPA-2G-4G-8000-P-BC	High Power Amplifier, 8-12GHz, 8000W Pulse, Built in air or liquid cooling, without LCD and IP grad.	Basic version
RPA-2G-4G-8000-P-BC-M	High Power Amplifier, 2-4GHz, 8000W Pulse, Built in air or liquid cooling, with LCD.	Add LCD display touchscreen
RPA-2G-4G-8000-P-BC-IPxx	High Power Amplifier, 2-4GHz, 8000W Pulse, Built in air or liquid cooling, with LCD and IP grad.	Add Ingress protection grad