



Power Amplifier

Model: PA-1M-200M-32

1-200MHz 32W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 1-200MHz
- High output power at saturation, 32W Min.
- High gain, 45 dB Min.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-1M-200M-32 is a power amplifier with a minimum small signal gain of 45 dB and a minimum Psat of 32W across the frequency range of 1 to 200MHz. The DC power requirement for the amplifier is +28 VDC/5 A. The input and output port configuration offers coax adapter structure with SMA female. And it has built-in protection functions included over TEM protection.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	1		200	GHz
Small Signal Gain	45	47		dB
Small Signal Gain Flatness			±3	dB
Output P1dB	43			dBm
Output Psat	45			dBm
Input VSWR		1.5	2	:1
DC Voltage		+28		V DC
DC Supply Current		5		A
Impedance		50		Ohms

Mechanical Specifications:

ParameterKg	Value	Notes
Operating Temperature*	-40°C to +50°C	
Non-operating Temperature*	-50°C to +60°C	
Relative humidity	95%	
RF Input/Output Connector	SMA Female/SMA Female	
DC Bias	DSUB-9	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	170*94*20(Without Heatsink) 264*140*82(With Heatsink)	mm
Weight	3.7	Kg

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+30 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V




Outline Drawing:

Unit:mm

PA-1M-200M-32

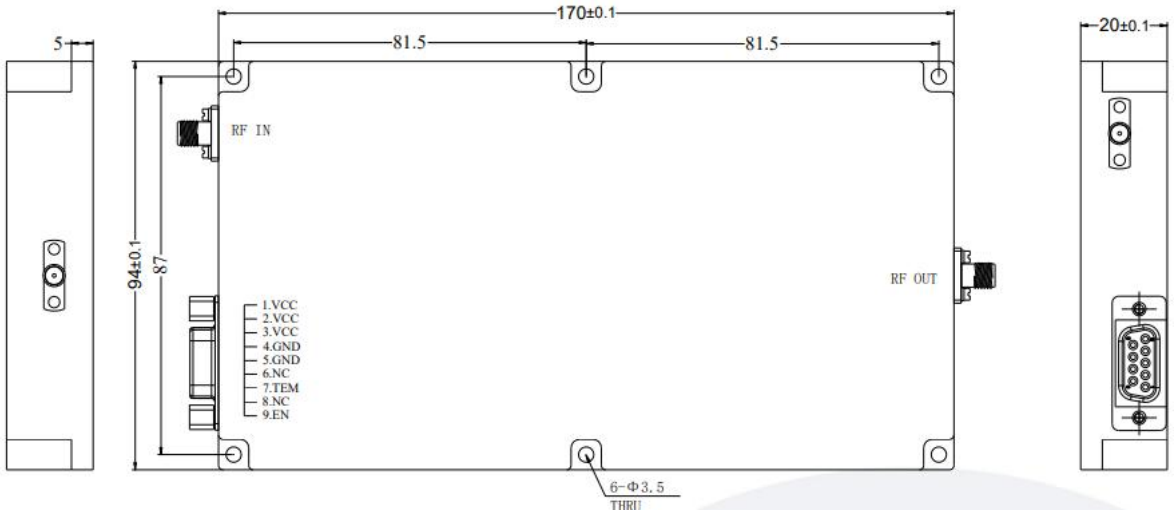

PA-1M-200M-32-HS

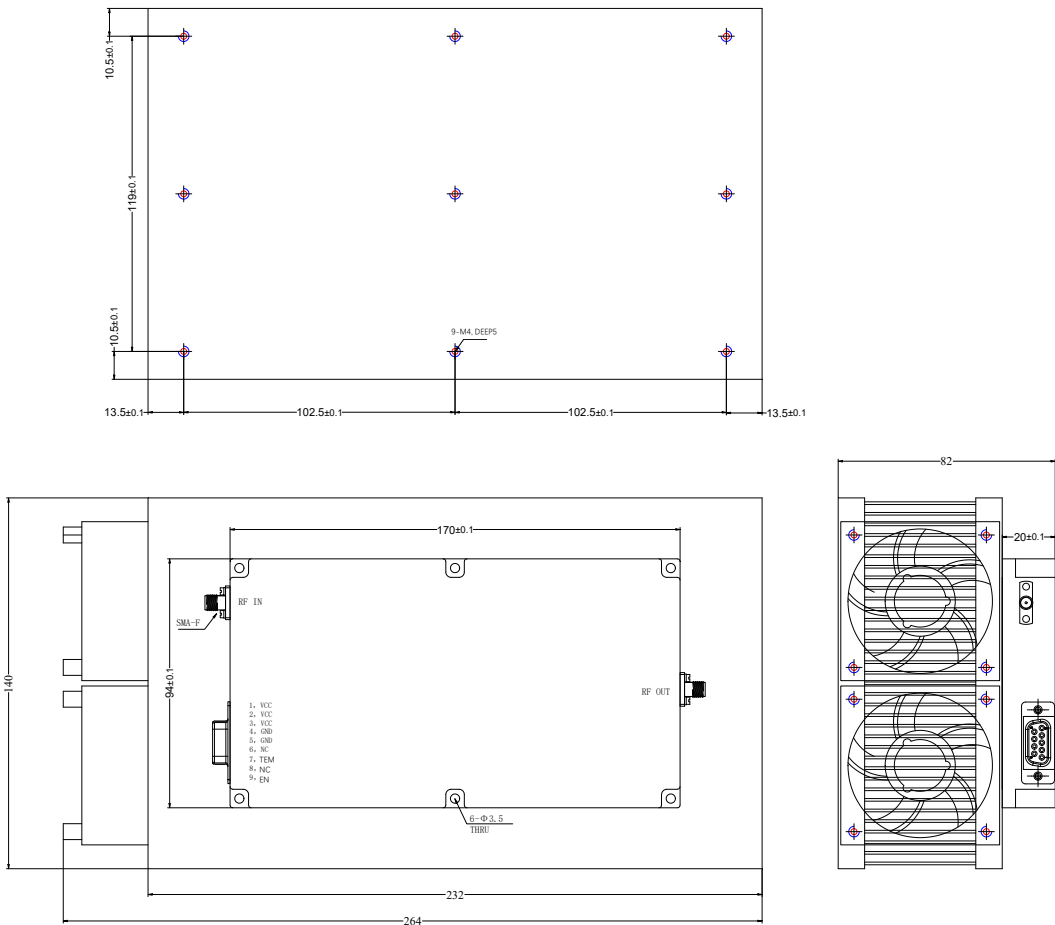



Fans Supply Current:

Fan power supply	
Red line	Power supply positive,+24.0-28.0VDC DC current: 0.3A
Black line	Ground

DC Supply Connector(DSUB-9 Female):

Pin	Name	Function
1	+48V	+26.0-30.0VDC
2	+28V	+26.0-30.0VDC
3	+28V	+26.0-30.0VDC
4	GND	Ground
5	GND	Ground
6	NC	Not connected
7	Over TEM	When the temperature of the case exceeds 85 °C, the power amplifier will turn off and this pin will be pulled high. If the temperature of case drops to 70 °C, the power amplifier will return to normal operation, and this pin will be pulled low.
8	NC	Not connected
9	EN	Amplifier Enable: TTL High (5V) (Internally Pulled-High) Amplifier Disable: Short to ground


Ordering Information:

Base Number	Description	Optional
PA-1M-200M-32	Power Amplifier,1-200MHz, Gain:45dB,Psat:32W,+28V DC	Without Heatsink
PA-1M-200M-32-HS	Power Amplifier,1-200MHz, Gain:45dB,Psat:32W,+28V DC	With Heatsink




Typical Performance Data:

Input VSWR vs Frequency

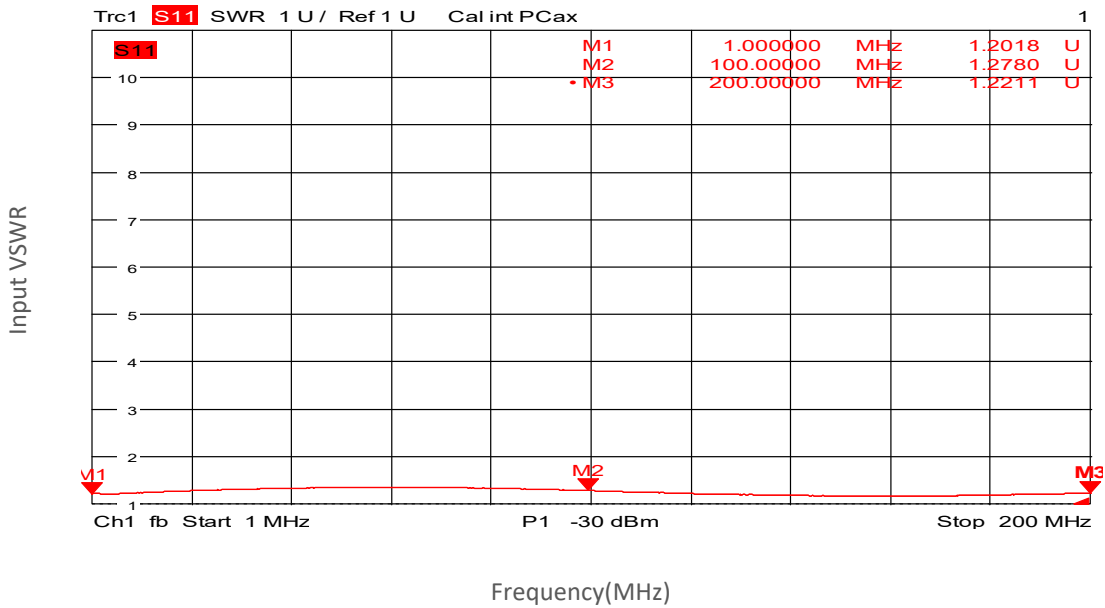

Small Signal Gain vs Frequency

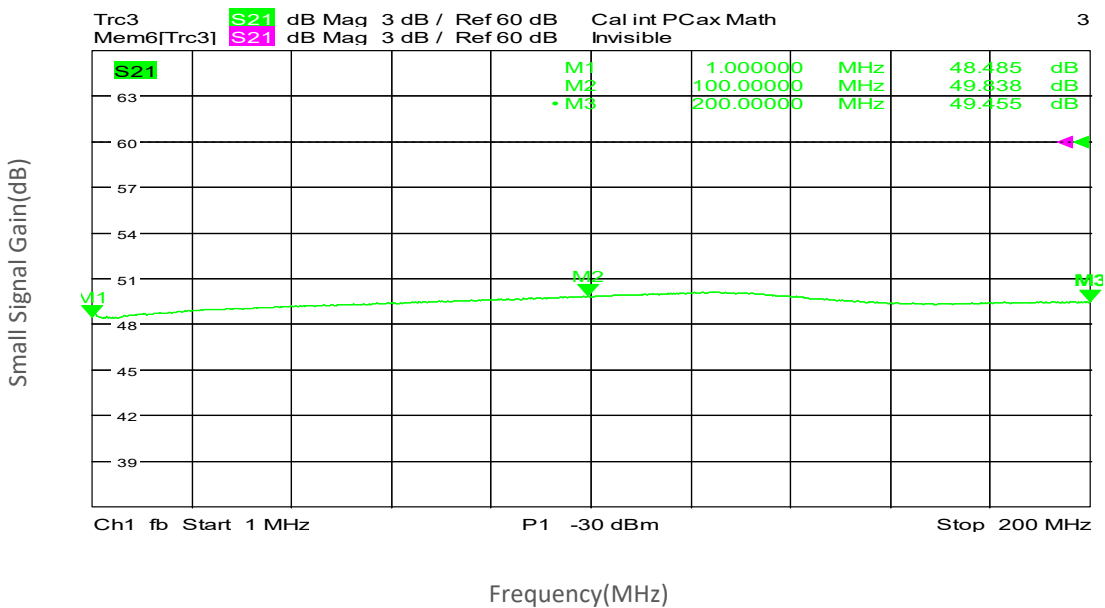


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

PndB vs Frequency

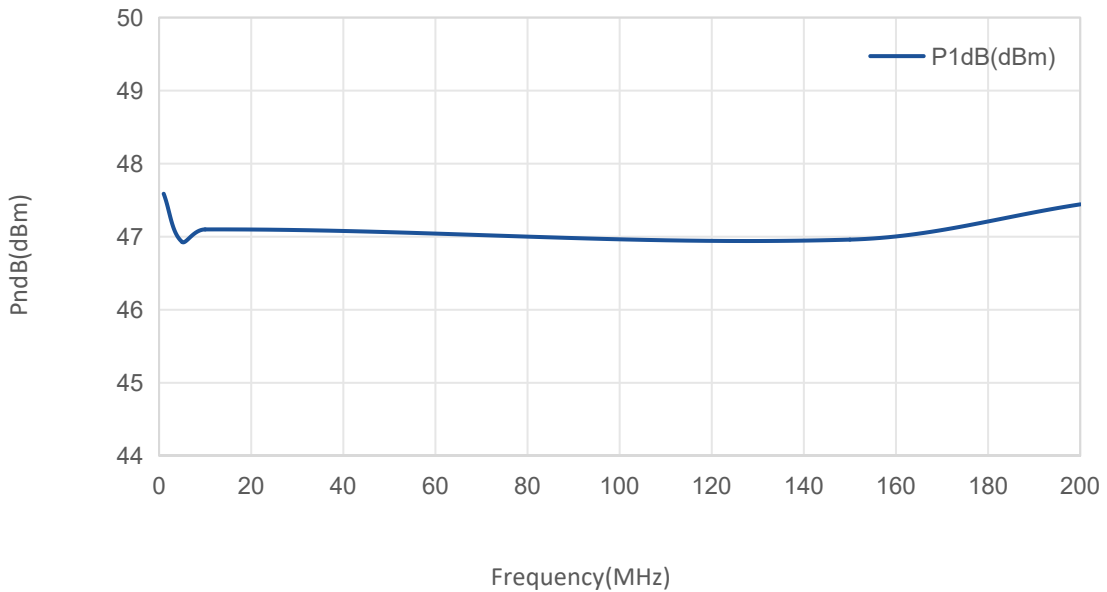

Gain vs Output Power

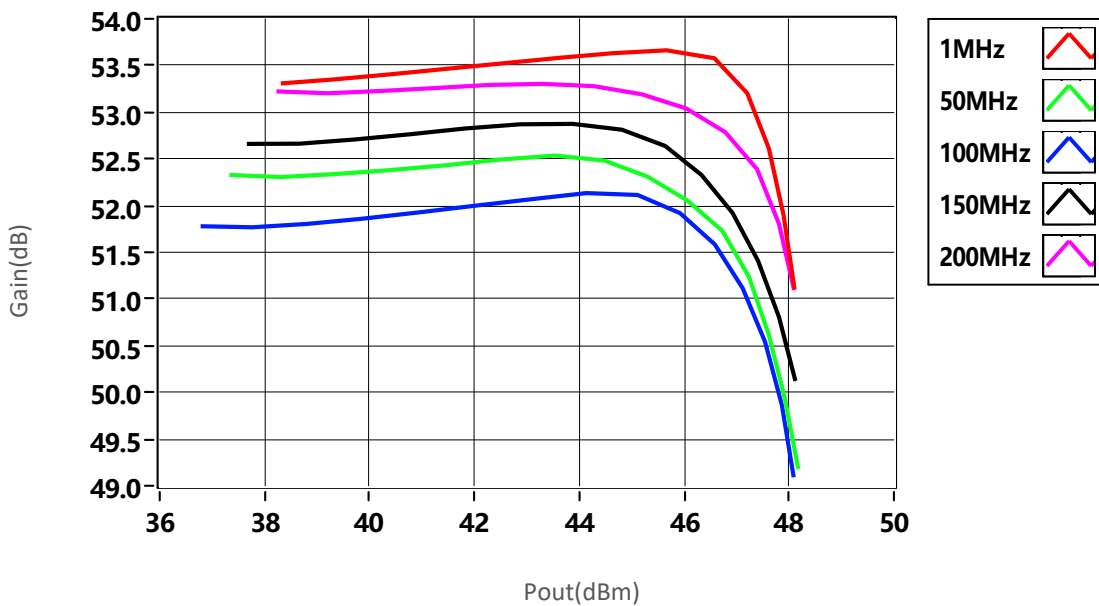


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Psat vs Frequency

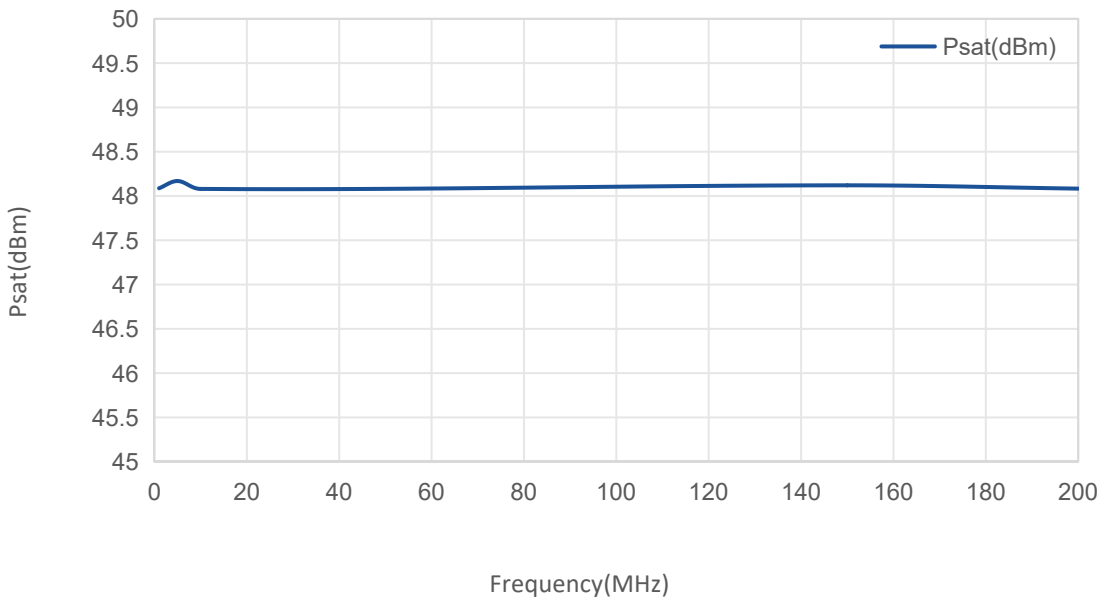

Harmonics vs Frequency

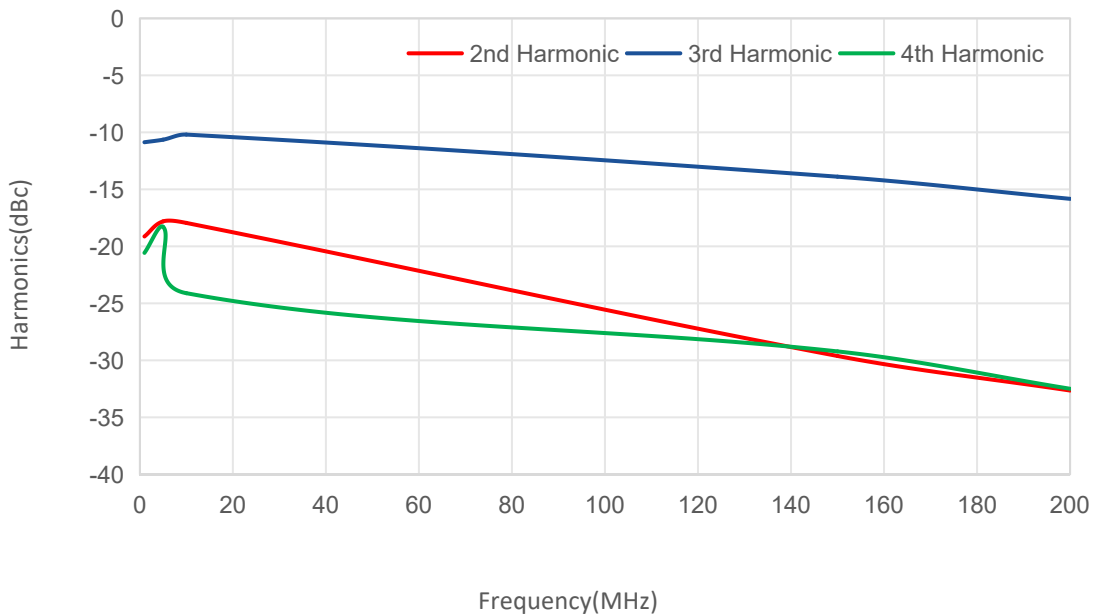

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.