



Power Amplifier

Model: PA-2G-18G-10

2-18GHz 10W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 2-18GHz
- High output power at saturation, 10W Min.
- High gain, 40 dB Typ.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-2G-18G-10 is a power amplifier with a typical small signal gain of 40 dB and a minimum P_{sat} of 10W across the frequency range of 2 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/2.4 A. The input and output port configuration offers coax adapter structure with SMA female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	2		18	GHz
Small Signal Gain		40		dB
Small Signal Gain Flatness		±4		dB
Output Psat	40			dBm
Spurious@Pout=40dBm			-50	dBc
2nd Harmonic@Pout=40dBm		-10		dBc
Input VSWR			2	:1
DC Voltage		28		V DC
DC Supply Current		2.4		A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-40°C to +50°C	
Non-operating Temperature*	-50°C to +60°C	
Relative humidity	95	%
RF Input/Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	60*60*11.5(Without heatsink) 150*127*74.5(With heatsink)	mm

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+29 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-2G-18G-10-HS

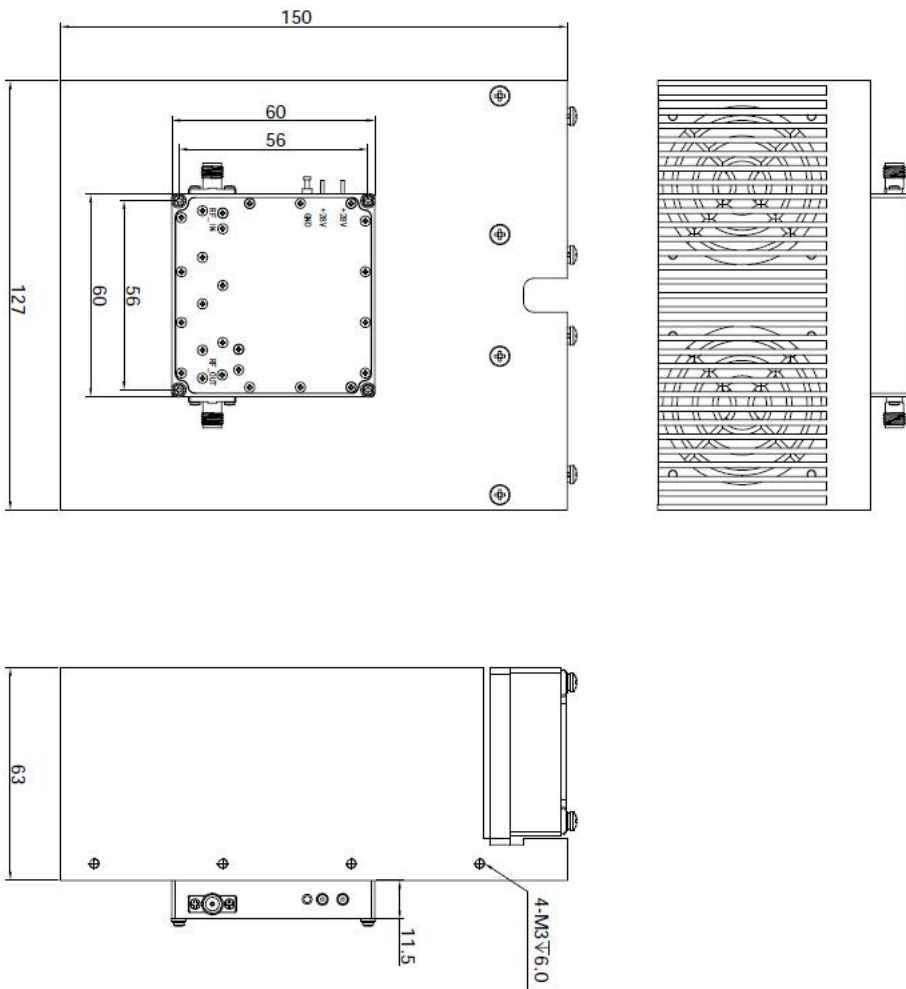


Ordering Information:

Base Number	Description	Optional
PA-2G-18G-10	Power Amplifier, 2-18GHz, Gain:40dB,Psat:10W,+28V DC	Without Heatsink
PA-2G-18G-10-HS	Power Amplifier, 2-18GHz, Gain:40dB,Psat:10W,+28V DC	With Heatsink




Typical Performance Data:

VSWR&Gain vs Frequency

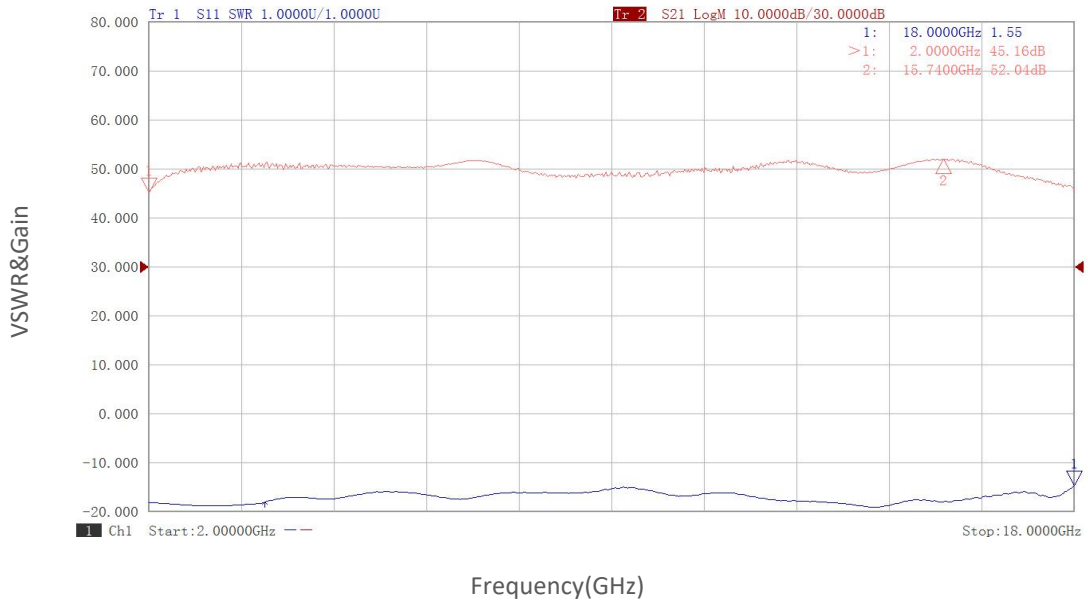

Gain vs Output Power

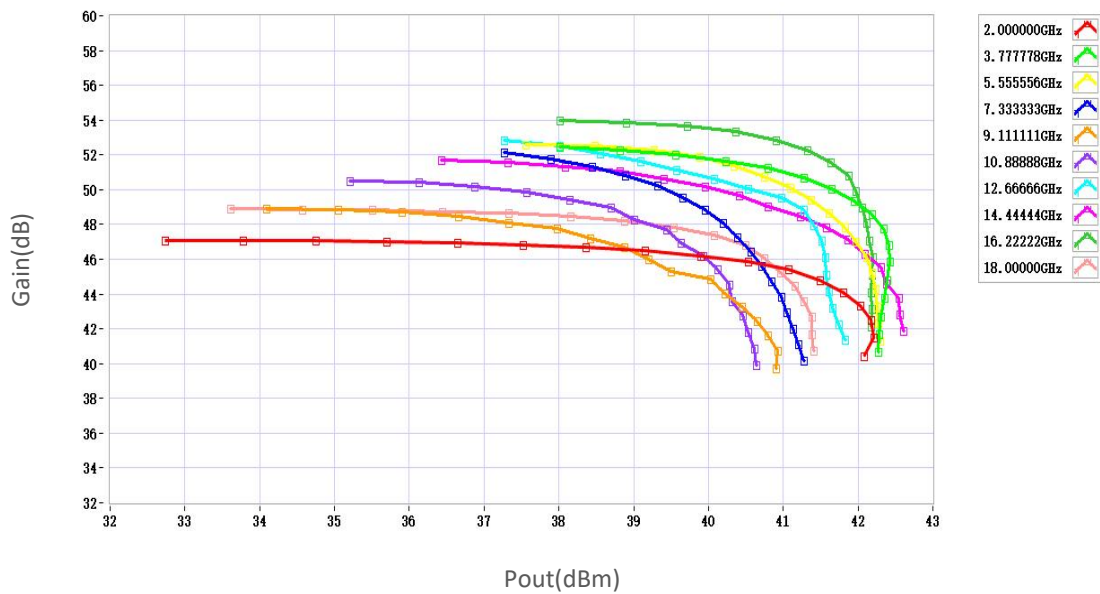


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

P1dB vs Frequency

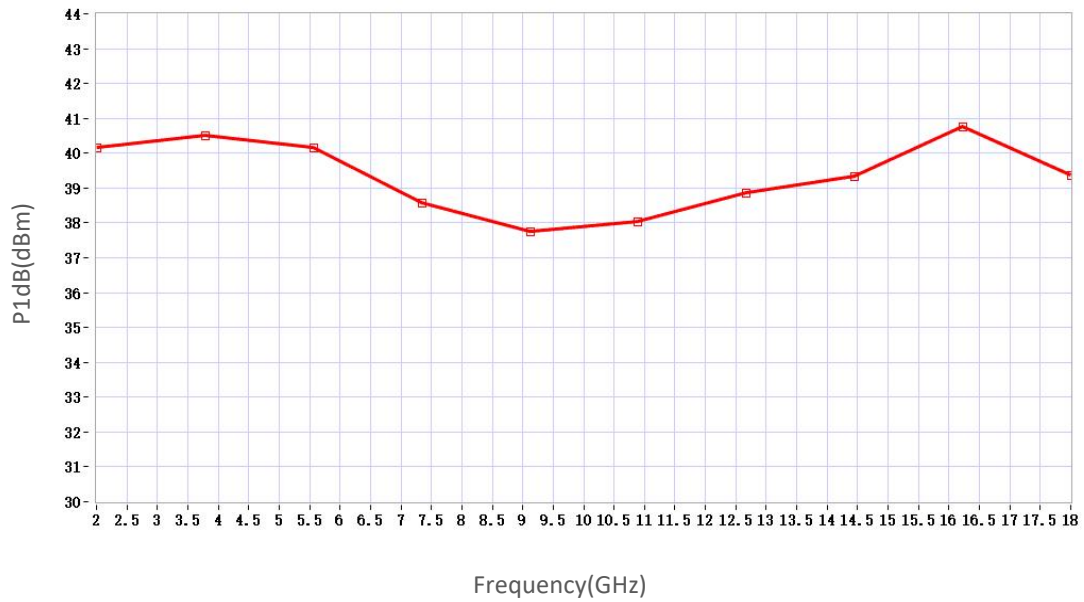

P3dB vs Frequency

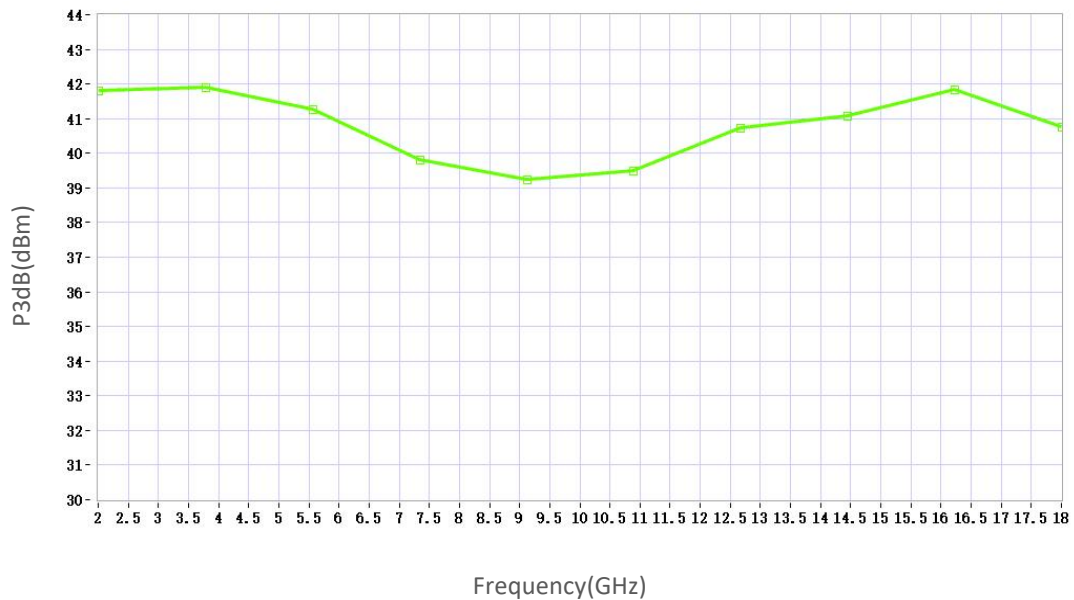


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.



Typical Performance Data:

P_{sat} vs Frequency

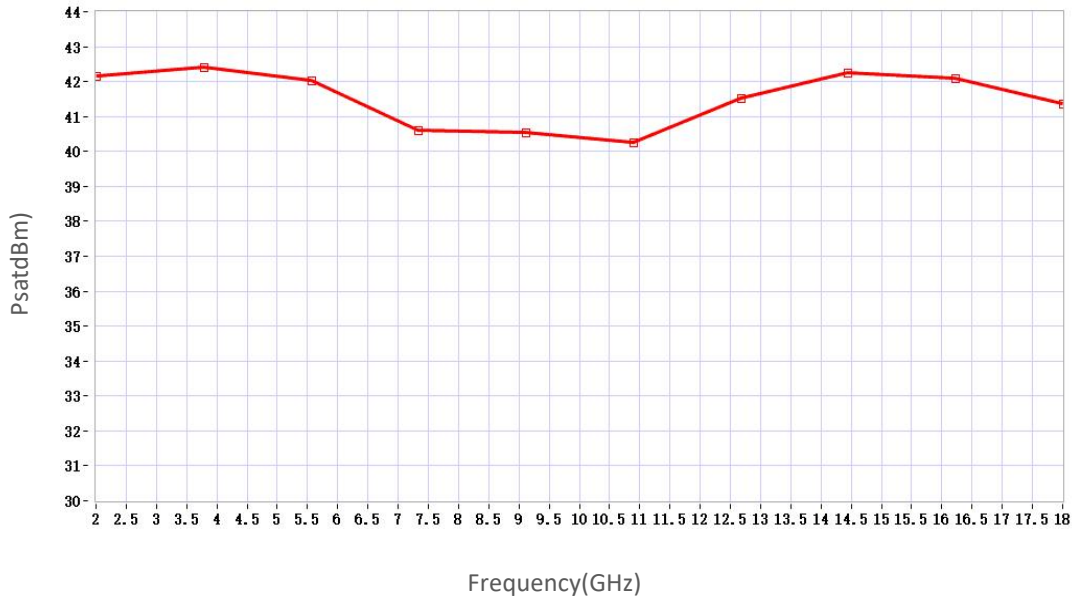

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.