



Power Amplifier

Model: PA-12G-18G-10

12-18GHz 10W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 12-18GHz
- High output power at saturation, 10W Min.
- High gain, 47 dB Min.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-12G-18G-10 is a power amplifier with a minimum power gain of 40 dB and a minimum Psat of 10W across the frequency range of 12 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/3 A. The input and output port configuration offers coax adapter structure with SMA female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	12		18	GHz
Power Gain	47			dB
Power Gain Flatness		±2		dB
Output P1dB		37		dBm
Output Psat	40			dBm
Input VSWR		2		:1
DC Voltage		+28		V DC
DC Supply Current		3		A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-40°C to +50°C	
Non-operating Temperature*	-50°C to +60°C	
Relative humidity	95	%
RF Input/Output Connector	SMA Female/SMA Female	
DC Bias	Feedthru capacitors	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	60*60*11(Without heatsink) 188*125*146(With heatsink)	mm
Weight	≤200	g

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:




Parameter	Value
Supply Bias Voltage	+29 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-12G-18G-10-HS

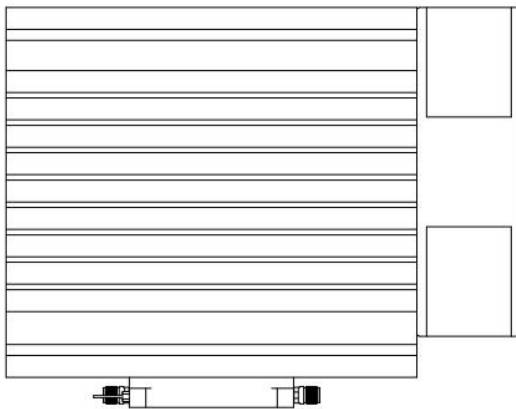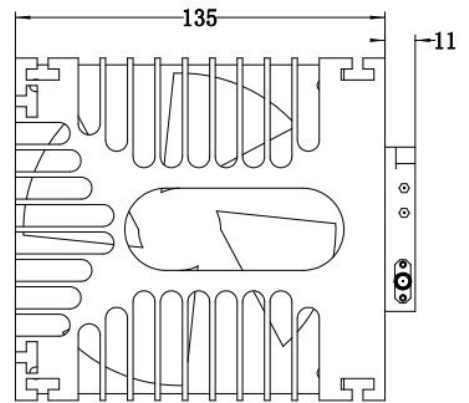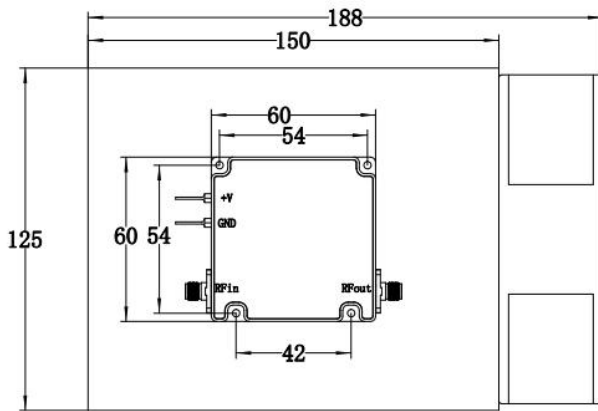


Ordering Information:

Base Number	Description	Optional
PA-12G-18G-10	Power Amplifier, 12-18GHz, Gain:47dB,Psat:10W,+28V DC	Without Heatsink
PA-12G-18G-10-HS	Power Amplifier, 12-18GHz, Gain:47dB,Psat:10W,+28V DC	With Heatsink




Typical Performance Data:

Input VSWR vs Frequency

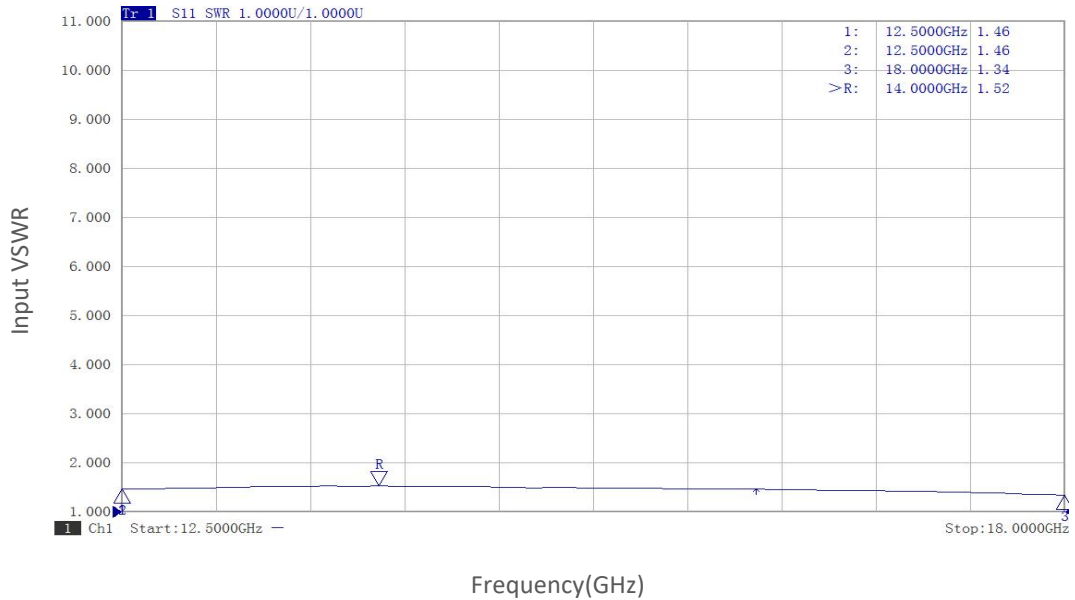

Small Signal Gain vs Frequency

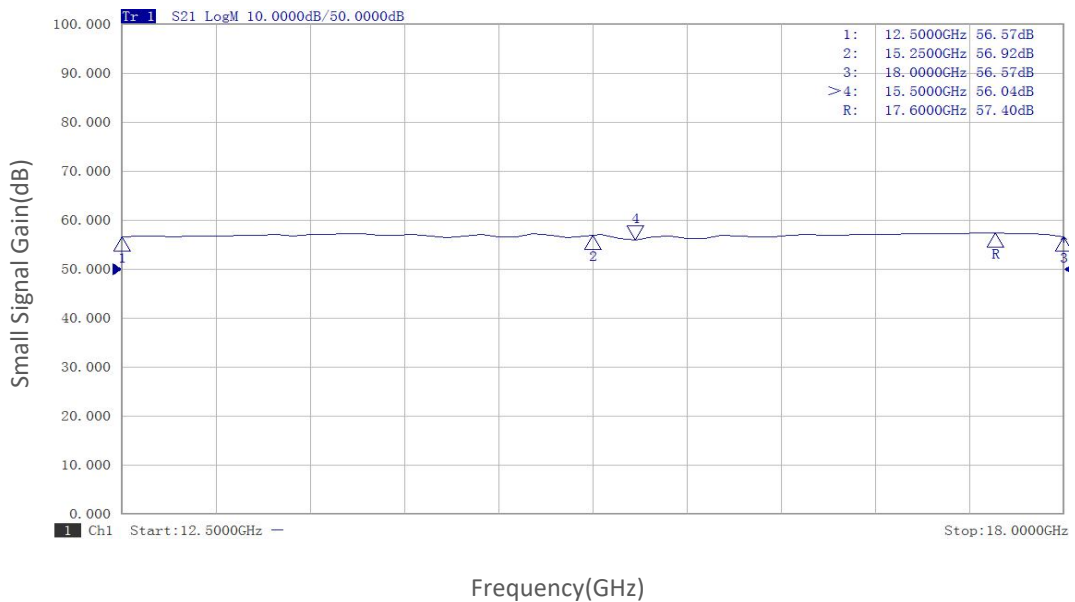


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

PndB vs Frequency

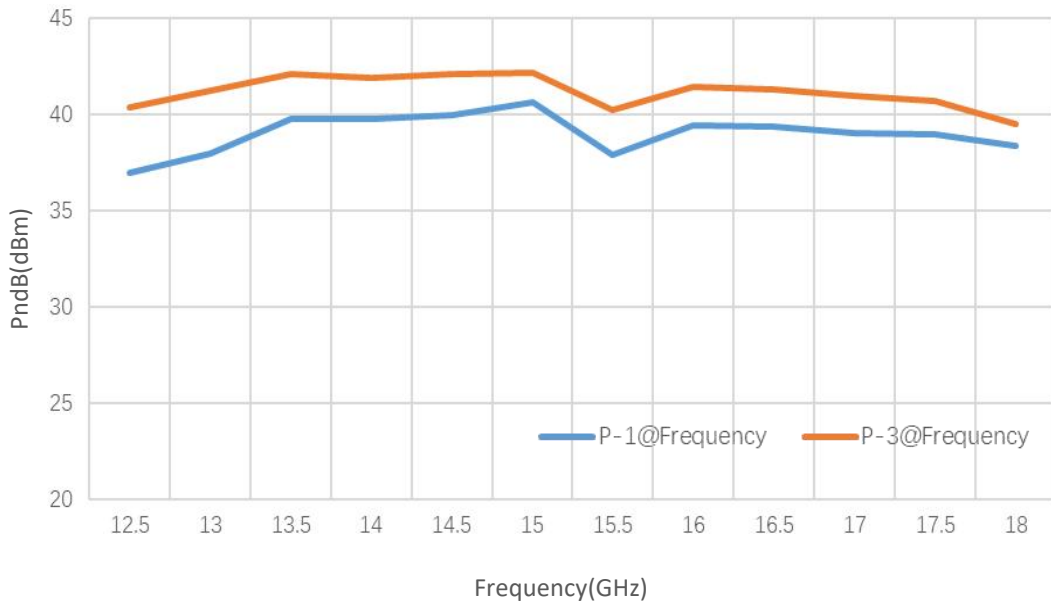

Pout@Pin

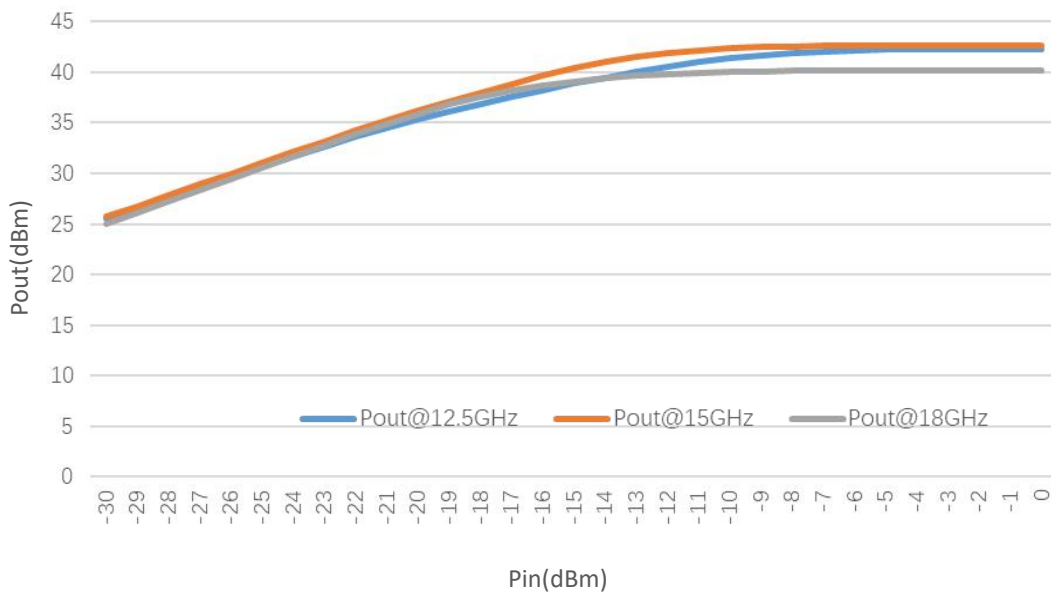


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Pout@Equal_Pin

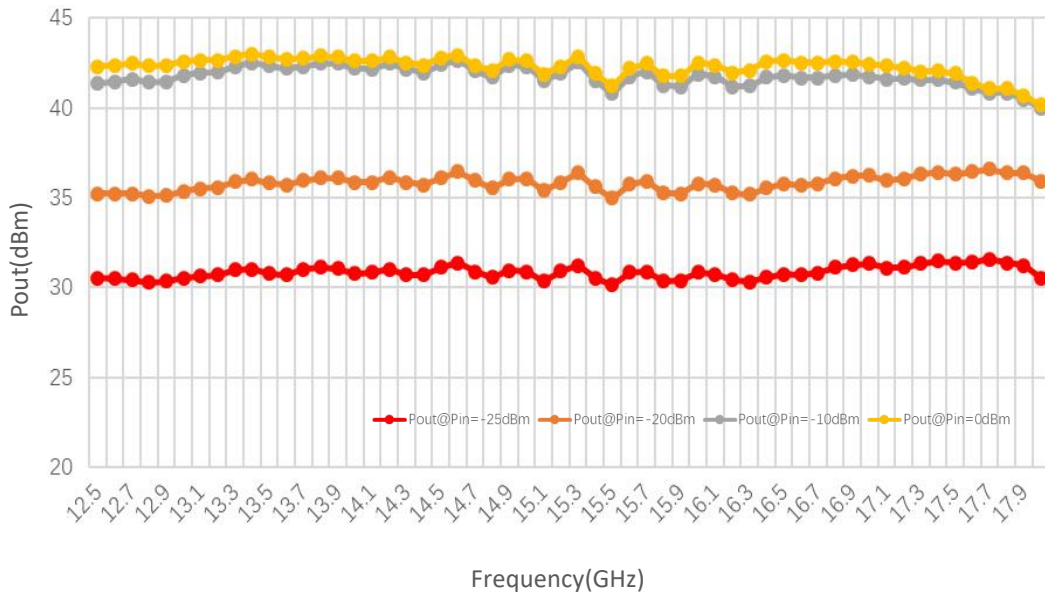

Spurious vs Frequency

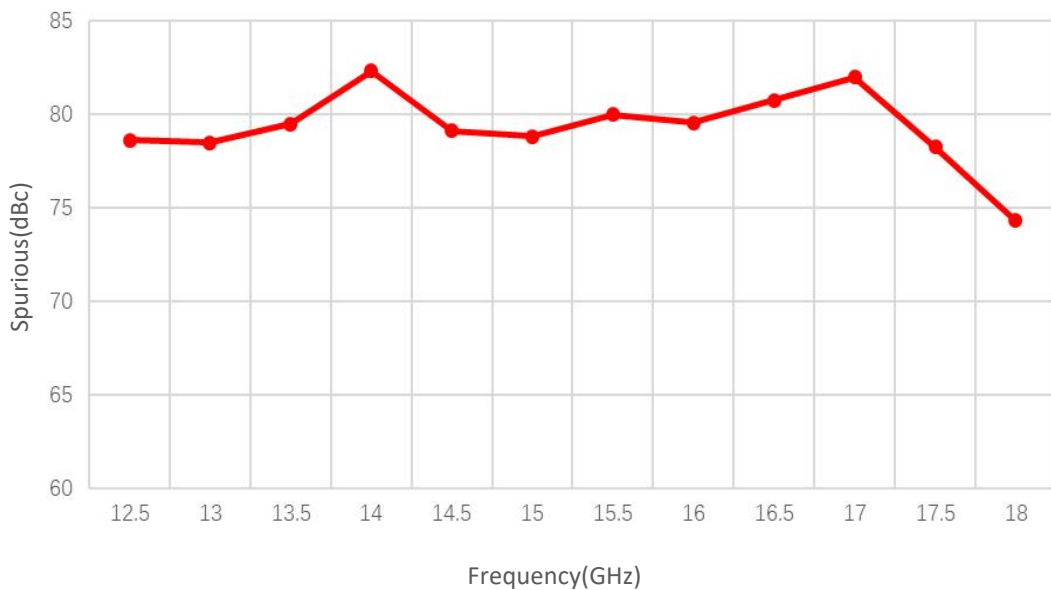


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.



Typical Performance Data:

Harmonic vs Frequency

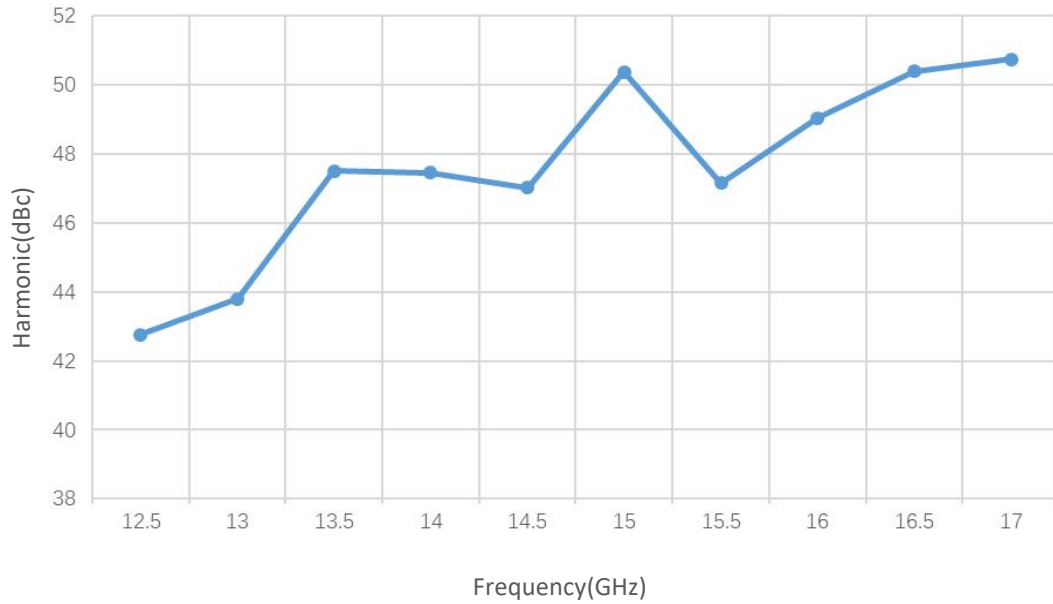

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.