



Power Amplifier

Model: PA-26G5-40G-10-L

26.5-40GHz 10W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 26.5-40GHz
- High output power at saturation, 10W Min.
- High gain, 40 dB Min.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-26G5-40G-10-L is a power amplifier with a minimum power gain of 40 dB and a minimum Psat of 10W across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +22 VDC/7.5 A. The input and output port configuration offers coax adapter structure with 2.92mm female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	26.5		40	GHz
Power Gain	40			dB
Power Gain Flatness		±4.5		dB
Output Psat	40	41		dBm
Spurious			-50	dBc
Input VSWR		2	2.5	:1
DC Voltage		+22	+24	V DC
DC Supply Current			7.5	A
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-40°C to +50°C	
Non-operating Temperature*	-50°C to +60°C	
Relative humidity	95	%
RF Input/Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Feedthru capacitors	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	72x60x12(Without heatsink) 150x90x58.5(With heatsink)	mm
Weight	300	g

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+24 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-26G5-40G-10-L

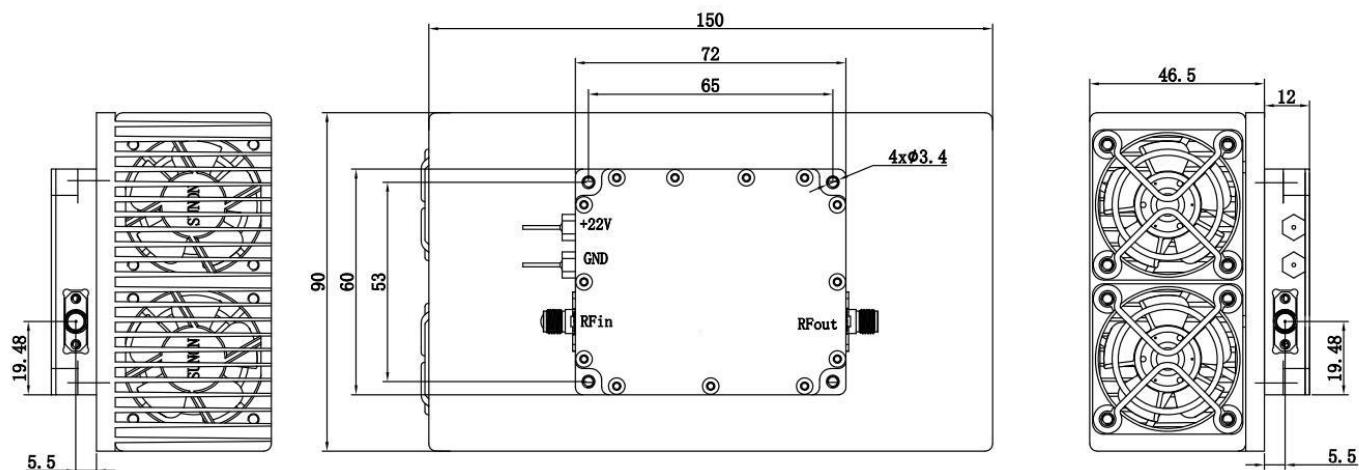


Ordering Information:

Base Number	Description	Optional
PA-26G5-40G-10-L	Power Amplifier, 26.5-40GHz, Gain:40dB,Psat:10W,+22V DC	Without Heatsink
PA-26G5-40G-10-L-HS	Power Amplifier, 26.5-40GHz, Gain:40dB,Psat:10W,+22V DC	With Heatsink




Typical Performance Data:

Input VSWR vs Frequency

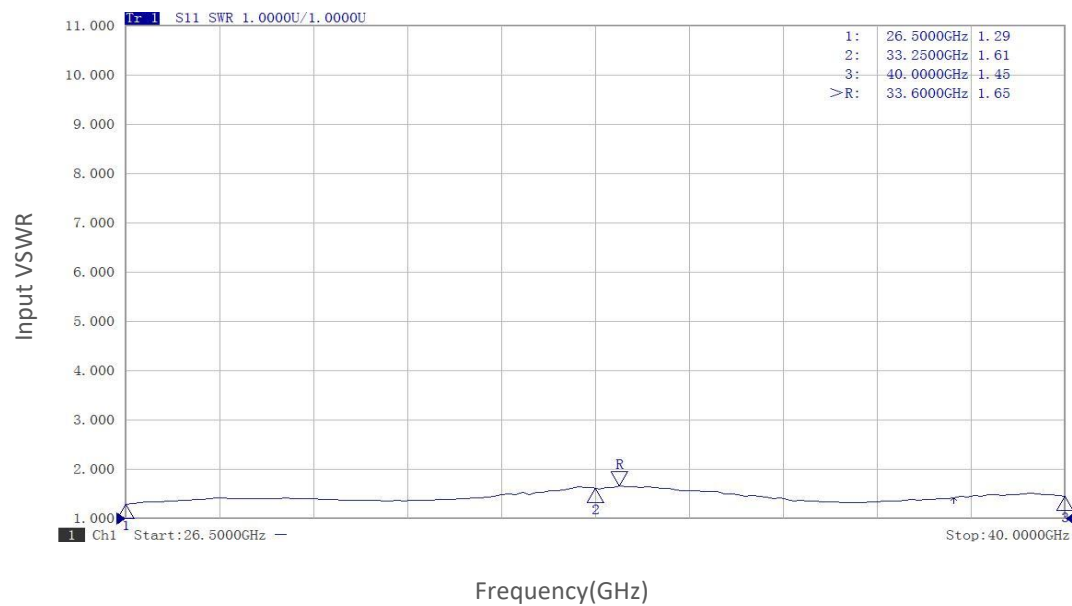

Power Gain vs Frequency

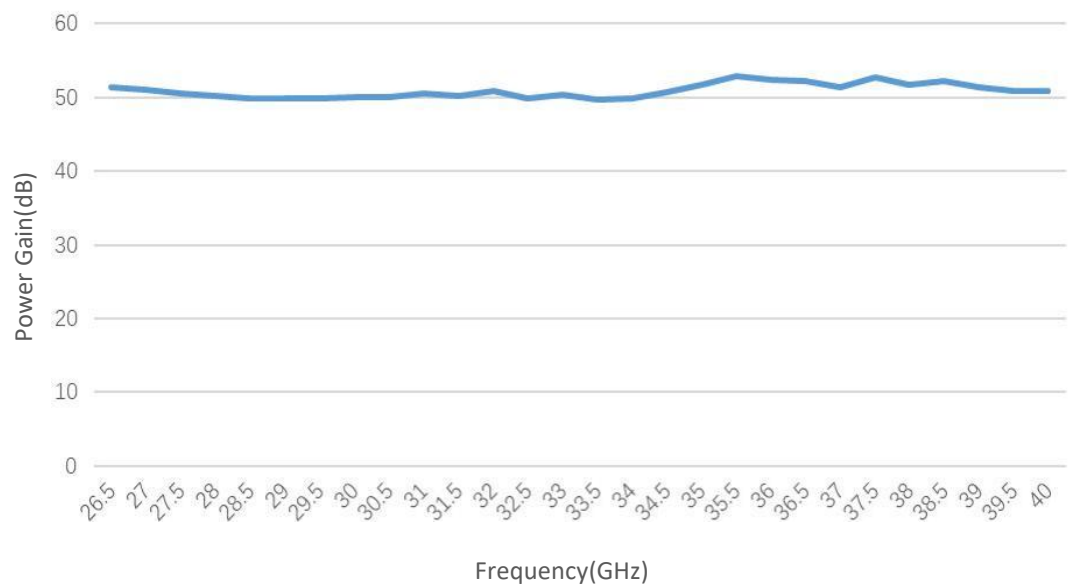


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

P1dB vs Frequency

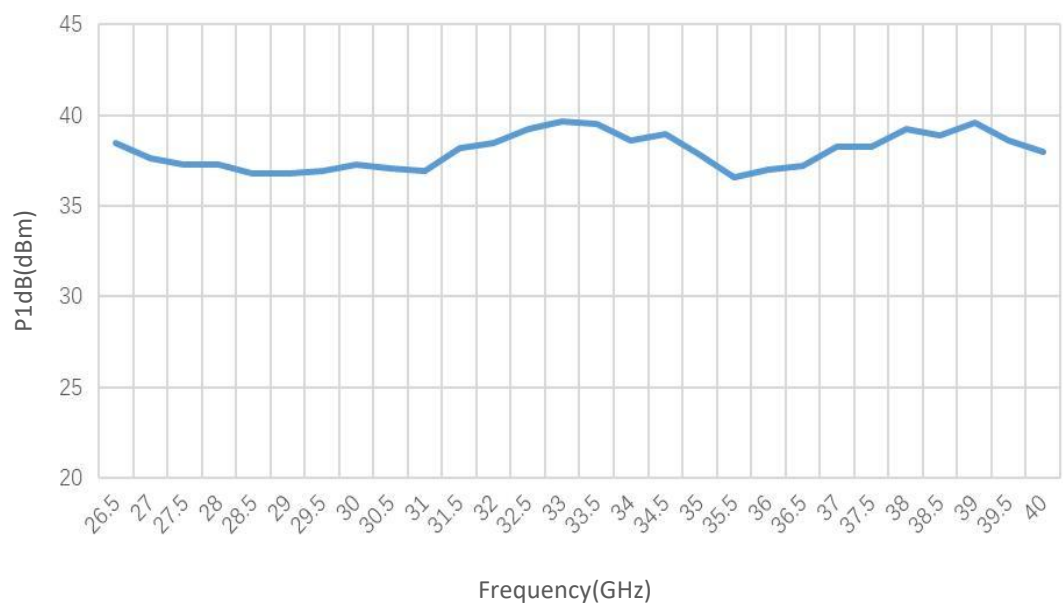



Pout@Pin

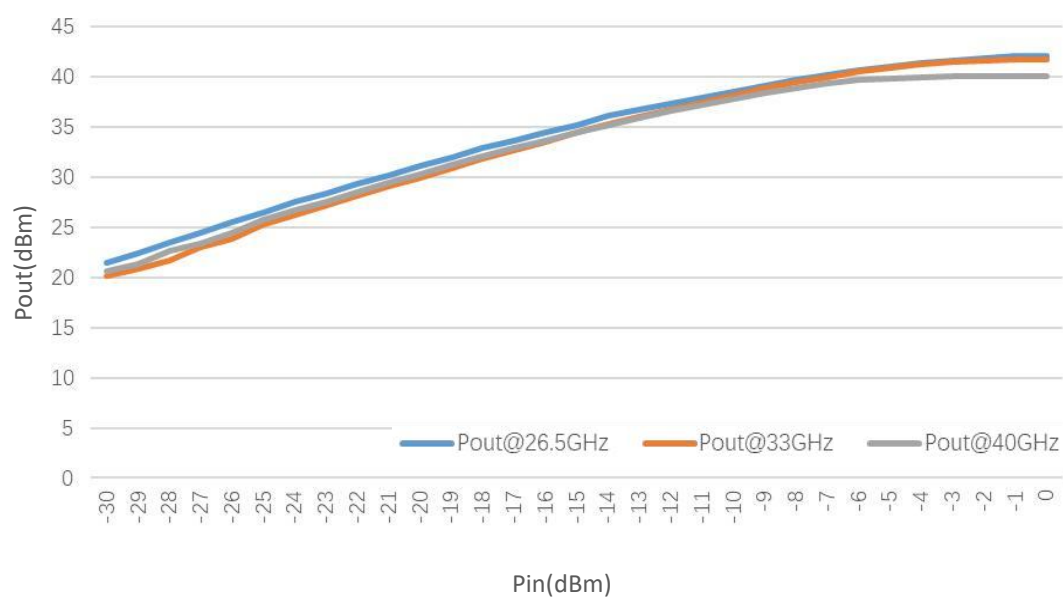

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.



Typical Performance Data:

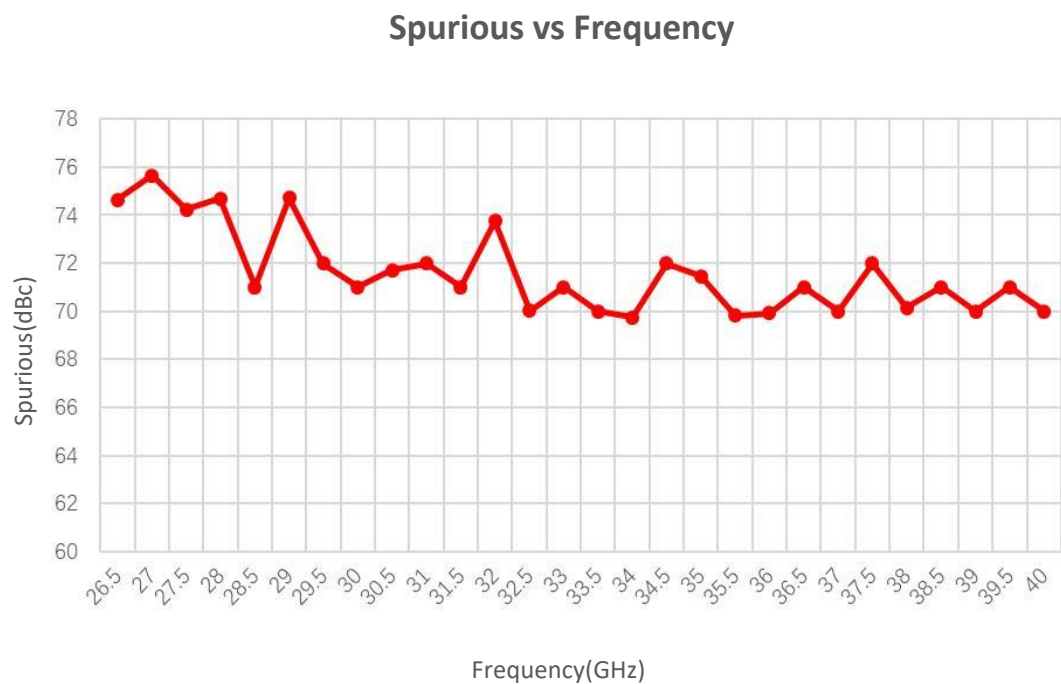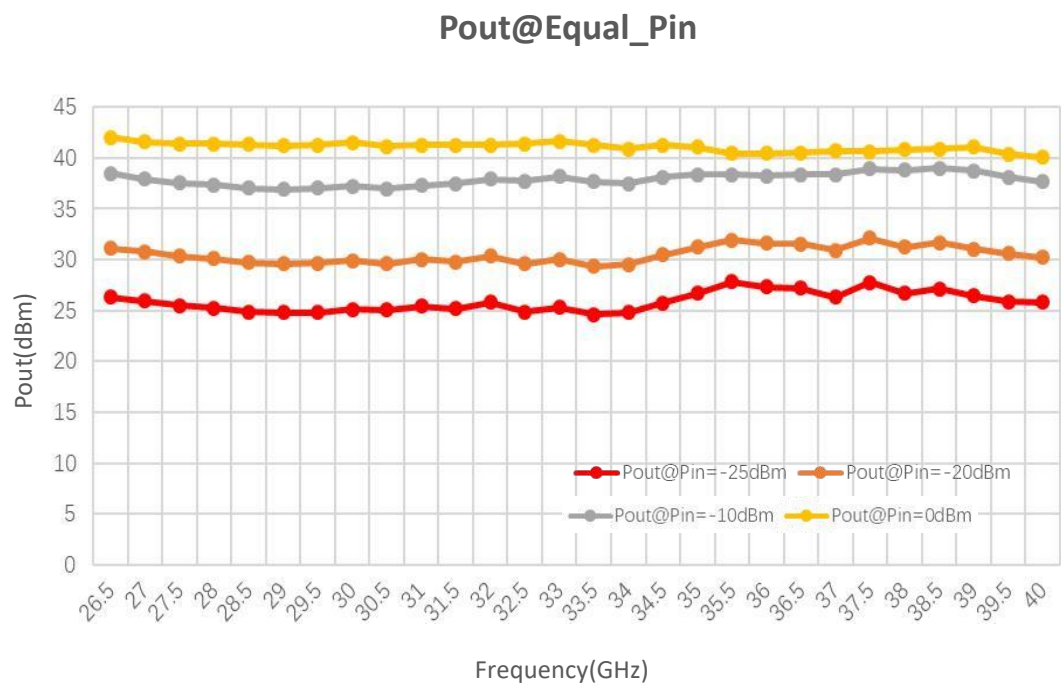

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.