



# High Power Amplifier

## Model:RPA-30M-500M-500

30-500MHz 500W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

### Features:

- Frequency range: 30-500MHz
- High output power at saturation, 57dBm Min
- High gain, 57dB Min
- Operates from AC line power: 220V

### Applications:

- Laboratory test instrument
- RF Power stress test
- EMI and antenna testing
- Reliability testing

### Product Overview:

The RPA-30M-500M-500 is a high power, rack mount amplifier with a self-contained AC power supply which can be used for a wide variety of laboratory testing applications. This rugged amplifier is capable of amplifying signals up to 500W output power over its entire operating bandwidth of 30 to 500MHz. The control functions RPA-300M-500M-500 possesses include the on/off of the power supply. Built-in safety features include fans alarms and automatic shut down mechanism to prevent damage in the event of excessive internal temperatures. The amplifier's output stage is further protected in the event of a fault condition, allowing high power operation for up to 5 minutes into an open or short load (refer to the maximum input power specifications). And it has built-in protection functions included over TEM, over voltage, over current and over VSWR protection.



## Electrical Specifications at 25°C:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	30-500			MHz
Small Signal Gain	SSGP	57	60		dB
Gain flatness	$\Delta$ GL		$\pm 1$	$\pm 2$	dB
Gain adjust Range	$\Delta$ GR		31.5		dB
Gain adjust Step	$\Delta$ GS		0.5		dB
Output Psat	Psat	57	57.5		dBm
Output P1dB	P1dB	53	54		dBm
Spurious@Pout=500W	Spur			-60	dBc
Harmonics@Pout=500W	HAM		-15	-10	dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac		220		V AC
AC Supply Current	Iac		7		A
Power Consumption	Pdiss		1500		W
Impedance	I/O-IMP	50			Ohms

## Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-20 to +50	°C
Non-operating Temperature*	-45 to +65	°C
Relative humidity	95	%
RF Input/Output Connector	N Female/N Female	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Communication Connector	DB15	
Cooling	Built in Cooling system,forced air cooling	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	19 Inch 4U*550	mm
Weight	$\leq 35$	$\leq 35$

\*Note: For a wider temperature range, please consult the manufacturer.




## Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

## Outline Drawing:

Unit:mm

RPA-30M-500M-500

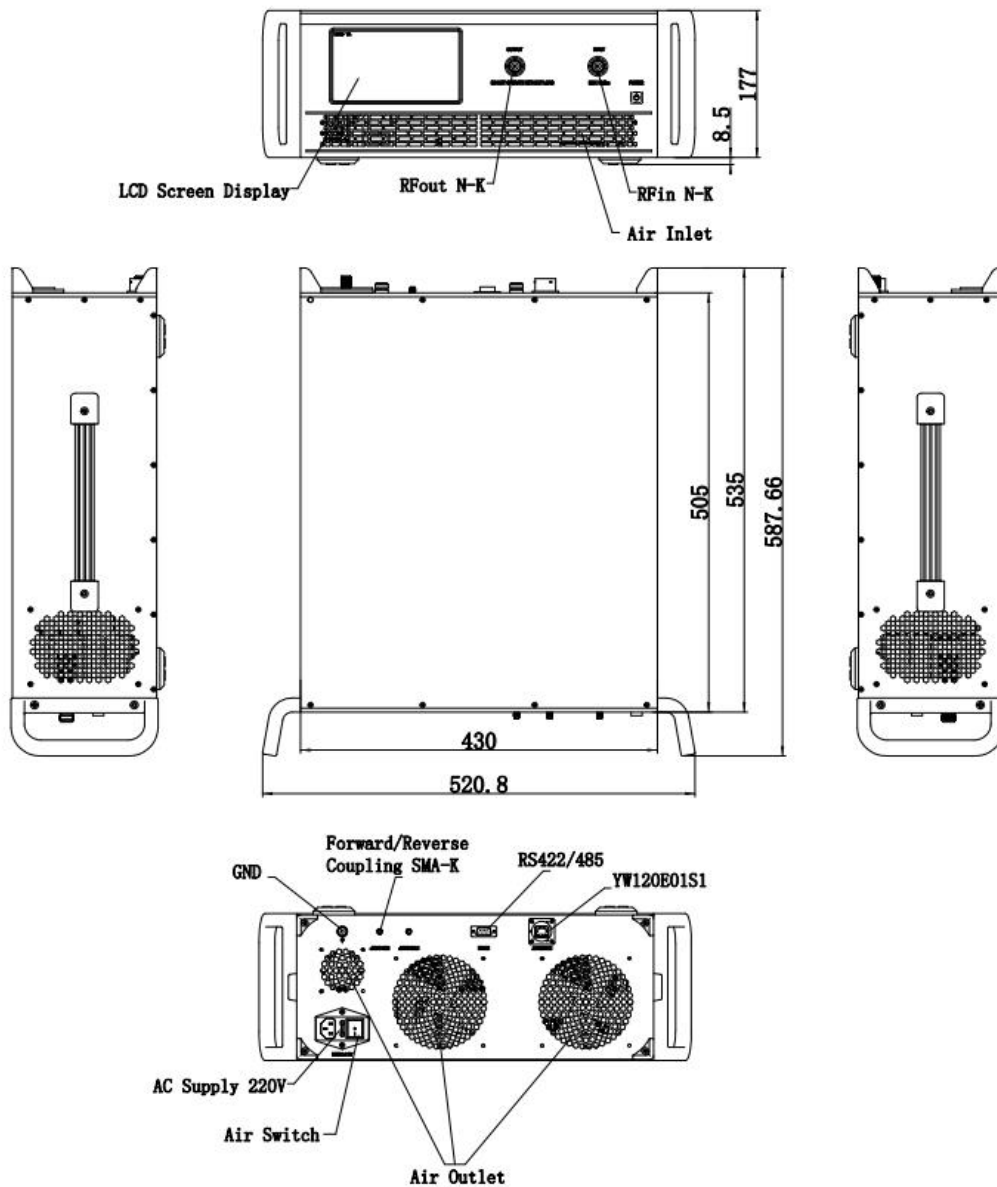



## Optional items:

Number	Parameter
1	LCD display touchscreen
2	Ingress protection grad
3	Customized operating temperature range
4	Built in Cooling system(air or liquid)
5	Types of RF,coupling and monitor&control interfaces

## Ordering Information:

Base Number	Description	Optional
RPA-30M-500M-500	High Power Amplifier, 30-500MHz, 500W CW, Built in air or liquid cooling, without LCD and IP grad.	Basic version
RPA-30M-500M-500-M	High Power Amplifier, 30-500MHz, 500W CW, Built in air or liquid cooling, with LCD.	Add LCD display touchscreen
RPA-30M-500M-500-IPxx	High Power Amplifier, 30-500MHz, 500W CW, Built in air or liquid cooling, with LCD and IP grad.	Add Ingress protection grad