



Power Amplifier

Model: PA-1G-6G-200

1-6GHz 200W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 1-6GHz
- High output power at saturation, 200W Min.
- High gain, 53 dB Min.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-1G-6G-200 is a power amplifier with a minimum small signal gain of 53 dB and a minimum Psat of 200W across the frequency range of 1 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/45 A. The input ports configuration offers coax adapter structure with SMA female and output ports configuration offers coax adapter structure with DIN female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	1		6	GHz
Small Signal Gain	53	57		dB
Small Signal Gain Flatness		±4	±4.5	dB
Output P1dB		47		dBm
Output Psat	53	53.5		dBm
Input VSWR		1.5	2	:1
DC Voltage	26	28	30	V DC
Static Current		3		A
Saturation current		45	50	A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-20°C to +50°C	
Non-operating Temperature*	-30°C to +60°C	
Relative humidity	95	%
RF Input/Output Connector	SMA Female/DIN Female	
DC Bias	Solder Pin	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	366 x 343 x 141	mm
Weight	17	Kg

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+30 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-1G-6G-200

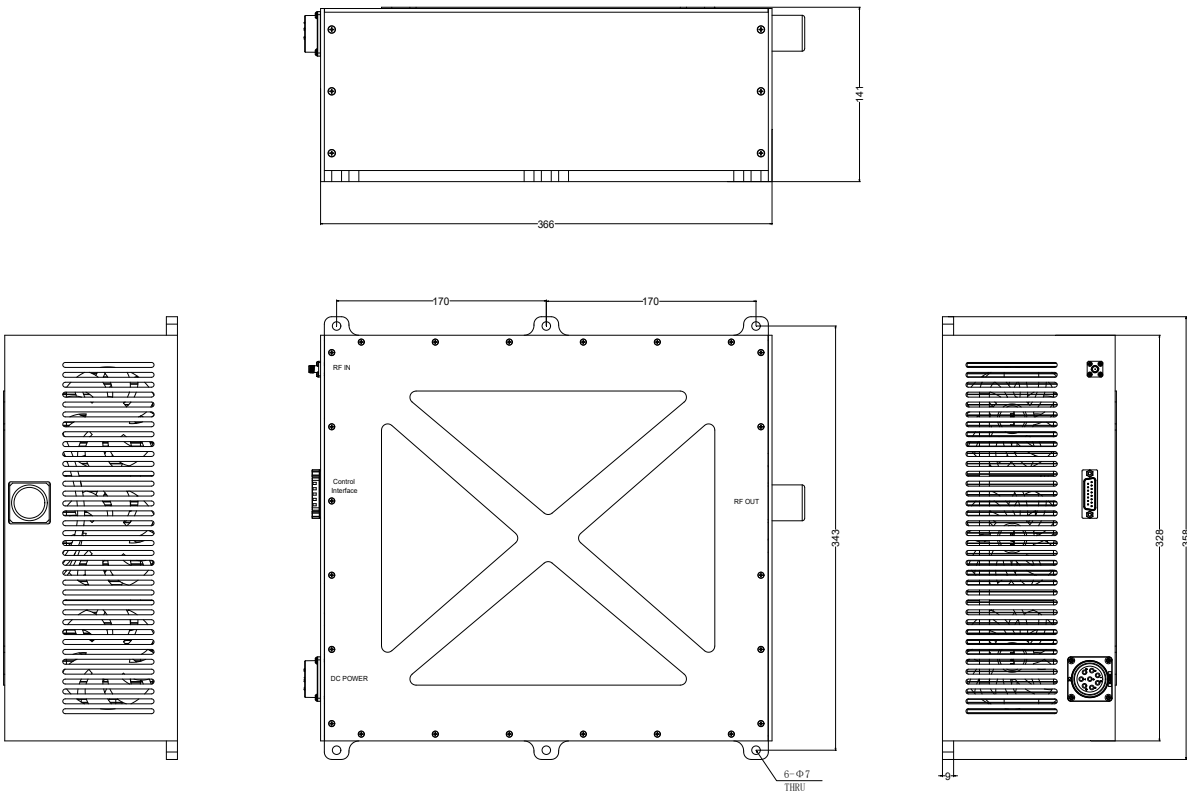

DC Supply Connector(WS28-Z-8 Female):

Pin	Name	Function
1~4	VCC	Power supply positive,+26.0-30.0VDC
5~8	GND	Ground



Control Connector(DSUB-9 Female):

Pin	Name	Function
1	EN	Amplifier Enable: TTL High (5V) (Internally Pulled-High) Amplifier Disable: Short to ground
2	NC	No connection
8	Over TEM	When the temperature of the case exceeds 75 °C, the power amplifier will turn off and this pin will be pulled high. If the temperature of case drops to 70 °C, the power amplifier will return to normal operation, and this pin will be pulled low.
4~8	NC	No connection
9	GND	Ground

Ordering Information:

Base Number	Description	Optional
PA-1G-6G-200	Power Amplifier, 1-6GHz, Gain:53dB,Psat:200W,+28V DC	With Heatsink