



High Power Amplifier

Model:RPA-1G-40G-10

1-40GHz 10W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 1-40GHz
- High output power at saturation, 40dBm Min
- High gain, 40dB Min
- Operates from AC line power: 220V

Applications:

- Laboratory test instrument
- RF Power stress test
- EMI and antenna testing
- Reliability testing

Product Overview:

The RPA-1G-40G-10 is a high power, rack mount amplifier with a self-contained AC power supply which can be used for a wide variety of laboratory testing applications. This rugged amplifier is capable of amplifying signals up to 10W output power over its entire operating bandwidth of 1 to 40GHz. The control functions RPA-1G-40G-10 possesses include the on/off of the power supply, output power can be controlled by the automatic ALC system and frequency band switching. Built-in safety features include fans alarms and automatic shut down mechanism to prevent damage in the event of excessive internal temperatures. The amplifier's output stage is further protected in the event of a fault condition, allowing high power operation for up to 5 minutes into an open or short load (refer to the maximum input power specifications). And it has built-in protection functions included over TEM, over voltage, over current and over VSWR protection. It can also be remotely controlled via RS422 or Ethernet.



Electrical Specifications at 25°C:

Parameter		Symbol	Min	Typ	Max	Units
Frequency range		BW	Band A: 1-18 Band B: 18-40			GHz
Power Gain		GP	40			dB
Gain flatness	@Band A	Δ GL		± 5		dB
	@Band B			± 5		
Output Psat		Psat	40			dBm
Spurious@Pout=40dBm		Spur			-60	dBc
Harmonics	@Band A	HAM			-10	dBc
	@Band B				-15	
Input VSWR	@Band A	VSWRin			2.0	:1
	@Band B				2.5	
AC Voltage		Vac		220		V AC
Power Consumption	@Band A	Pdis			400	W
	@Band B				300	
Impedance		I/O-IMP	50			Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-20 to +50	°C
Non-operating Temperature*	-30 to +60	°C
Relative humidity	95	%
RF Input/Output Connector	2.92mm Female/2.92mm Female	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Digital Monitor & Control	RS422;Ethernet	
Cooling system	Built in Cooling system,forced air cooling	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	19 Inch 4U*540	mm
Weight	≤ 30	Kg

*Note: For a wider temperature range, please consult the manufacturer.




Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

RPA-1G-40G-10

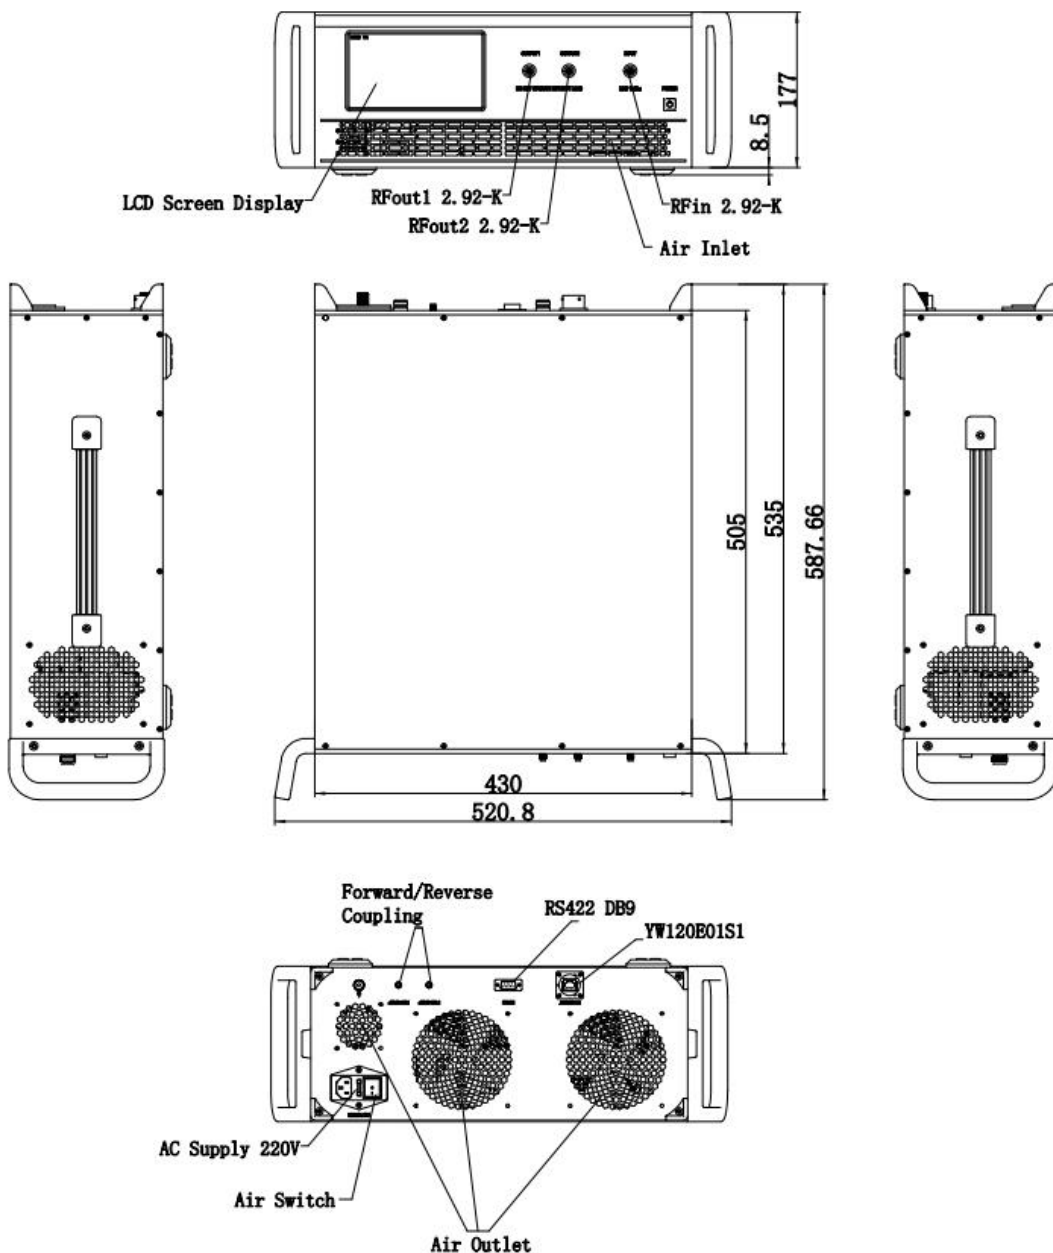



Optional items:

Number	Parameter
1	LCD display touchscreen
2	Ingress protection grad
3	Customized operating temperature range
4	Built in Cooling system(air or liquid)
5	Types of RF,coupling and monitor&control interfaces

Outline Drawing:

Base Number	Description	Optional
RPA-1G-40G-10	High Power Amplifier, 1-40GHz,10W CW, Built in air or liquid cooling, without LCD and IP grad.	Basic version
RPA-1G-40G-10-M	High Power Amplifier, 1-40GHz,10W CW, Built in air or liquid cooling, with LCD.	Add LCD display touchscreen
RPA-1G-40G-10-IPxx	High Power Amplifier, 1-40GHz,10W CW , Built in air or liquid cooling, with LCD and IP grad.	Add Ingress protection grad