



High Power Amplifier

Model:RPA-2G-18G-10

2-18GHz 10W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 2-18GHz
- High output power at saturation, 40dBm Min
- High gain, 40dB Min
- Operates from AC line power: 220V

Applications:

- Laboratory test instrument
- RF Power stress test
- EMI and antenna testing
- Reliability testing

Product Overview:

The RPA-2G-18G-10 is a high power, rack mount amplifier with a self-contained AC power supply which can be used for a wide variety of laboratory testing applications. This rugged amplifier is capable of amplifying signals up to 10W output power over its entire operating bandwidth of 2 to 18GHz. The control functions RPA-2G-18G-10 possesses include the on/off of the power supply and the control of the gain. Built-in safety features include fans alarms and automatic shut down mechanism to prevent damage in the event of excessive internal temperatures. The amplifier's output stage is further protected in the event of a fault condition, allowing high power operation for up to 5 minutes into an open or short load (refer to the maximum input power specifications). And it has built-in protection functions included over TEM, over voltage, over current and over VSWR protection. It can also be remotely controlled via RS422.



Electrical Specifications at 25°C:

| Parameter | Symbol | Min | Typ | Max | Units |
|-----------------------|-------------|------|---------|-----|-------|
| Frequency range | BW | 2-18 | | | GHz |
| Power Gain@Pout=40dBm | GP | 40 | | | dB |
| Gain flatness | Δ GL | | ± 3 | | dB |
| Output Psat | Psat | 40 | | | dBm |
| Spurious@Pout=40dBm | Spur | | | -60 | dBc |
| Harmonics@Pout=40dBm | HAM | | -15 | -10 | dBc |
| Input VSWR | VSWRin | | | 2.0 | :1 |
| AC Voltage | Vac | 220 | | | V AC |
| Power Consumption | Pdiss | | | 200 | W |
| Impedance | I/O-IMP | 50 | | | Ohms |

Mechanical Specifications:

| Parameter | Value | Notes |
|---------------------------------|---|-------|
| Operating Temperature* | -20 to +50 | °C |
| Non-operating Temperature* | -30 to +60 | °C |
| Relative humidity | 95 | % |
| RF Input/Output Connector | SMA Female/SMA Female | |
| Communication Connector | DB9/RJ45 | |
| Digital Monitor & Control | RS422 | |
| Cooling | Built in Cooling system,forced air cooling | |
| Altitude | 10,000 | feet |
| Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | |
| Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | |
| Dimensions W x H x D | 19 Inch 2U*550 | mm |
| Weight | ≤ 25 | Kg |

*Note: For a wider temperature range, please consult the manufacturer.




Absolute Maximum Ratings:

| Parameter | Value |
|-----------------------|----------------------|
| RF Input Power | +5 dBm |
| ESD sensitivity (HBm) | Class 0, passed 150V |

Outline Drawing:

Unit:mm

RPA-2G-18G-10

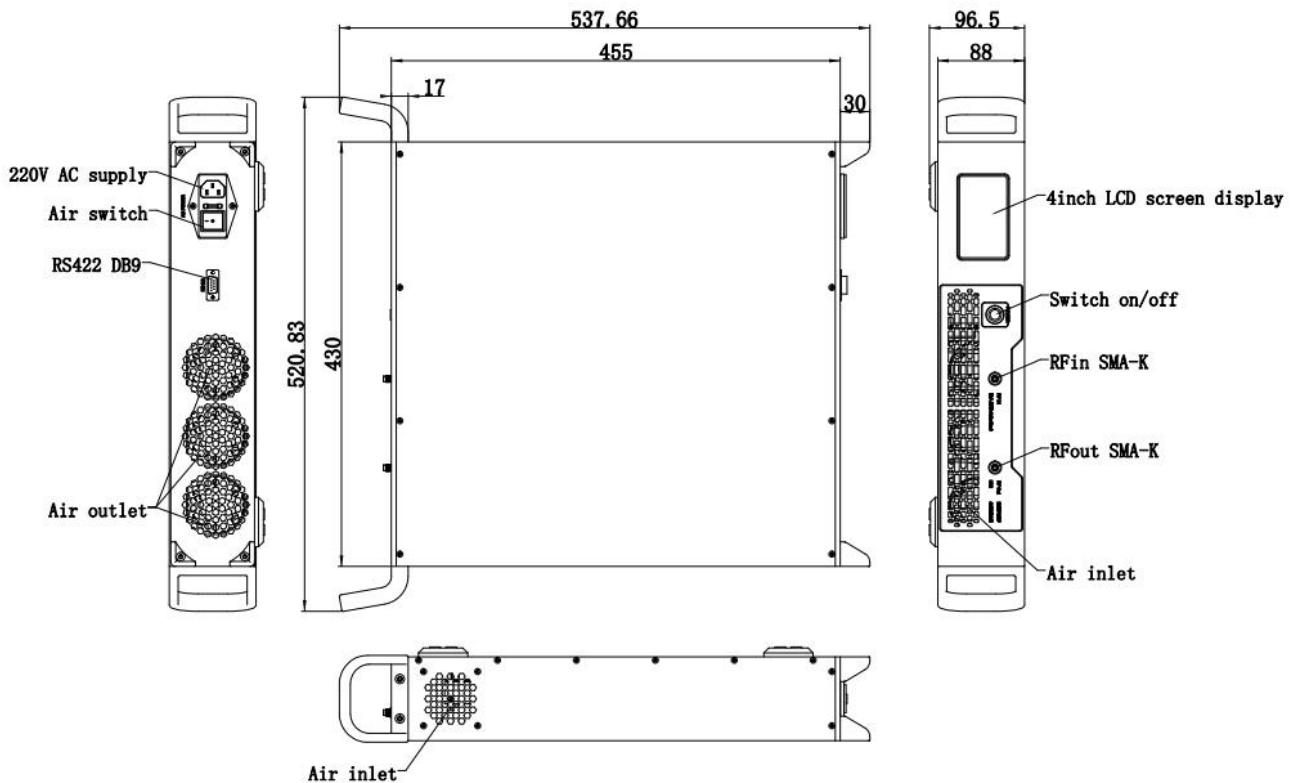

Optional items:

| Number | Parameter |
|--------|---|
| 1 | LCD display touchscreen |
| 2 | Ingress protection grad |
| 3 | Customized operating temperature range |
| 4 | Built in Cooling system(air or liquid) |
| 5 | Types of RF,coupling and monitor&control interfaces |




Outline Drawing:

| Base Number | Description | Optional |
|--------------------|---|-----------------------------|
| RPA-2G-18G-10 | High Power Amplifier, 2-18GHz, 10W CW, Built in air or liquid cooling, without LCD and IP grad. | Basic version |
| RPA-2G-18G-10-M | High Power Amplifier, 2-18GHz, 10W CW, Built in air or liquid cooling, with LCD. | Add LCD display touchscreen |
| RPA-2G-18G-10-IPxx | High Power Amplifier, 2-18GHz, 10W CW, Built in air or liquid cooling, with LCD and IP grad. | Add Ingress protection grad |

Typical Performance Data:

Small Signal Gain vs Frequency

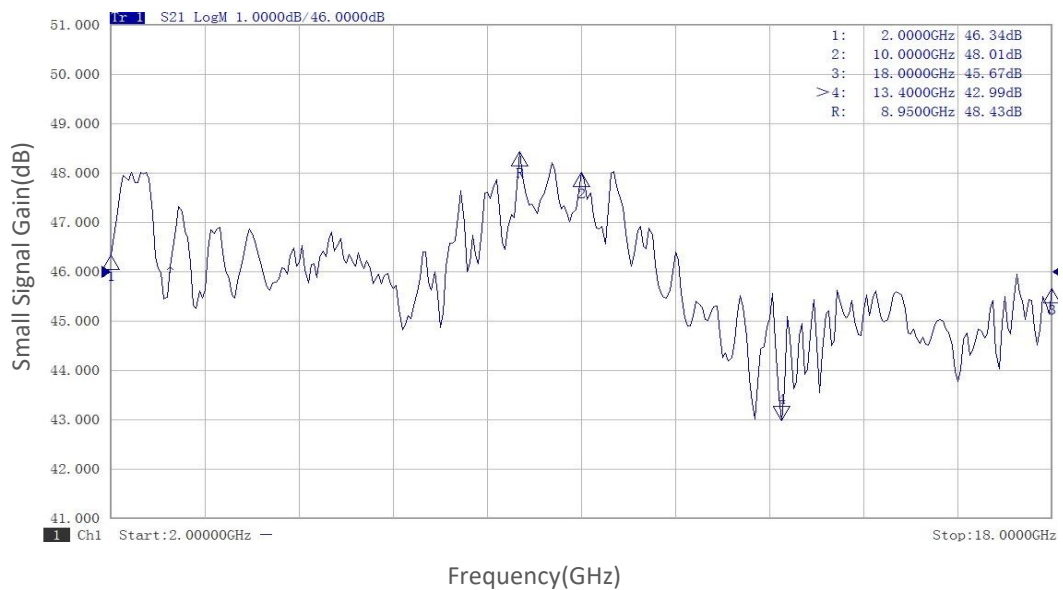


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Input VSWR vs Frequency

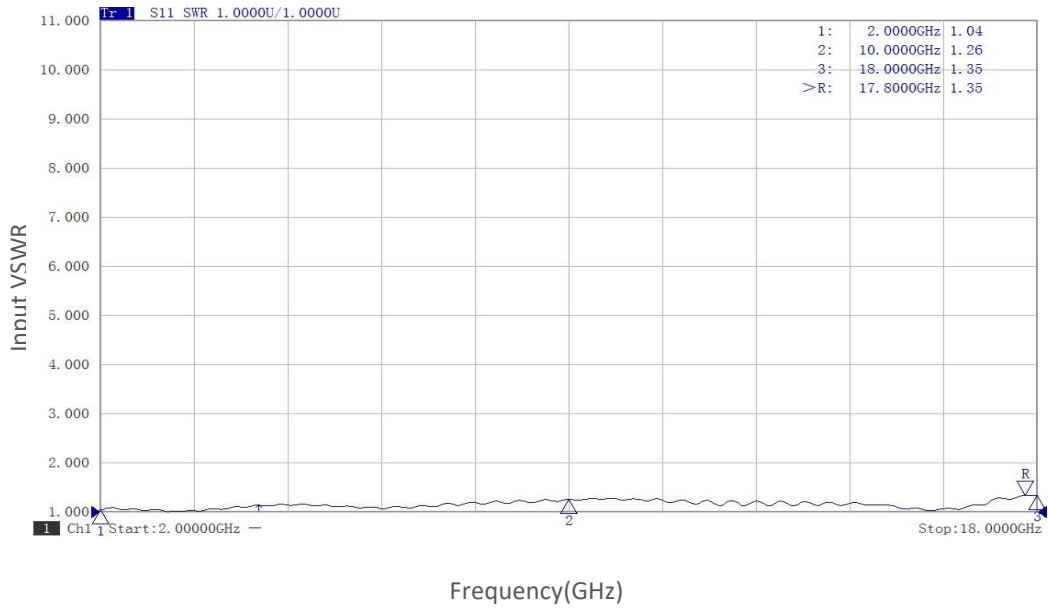



P1dB vs Frequency

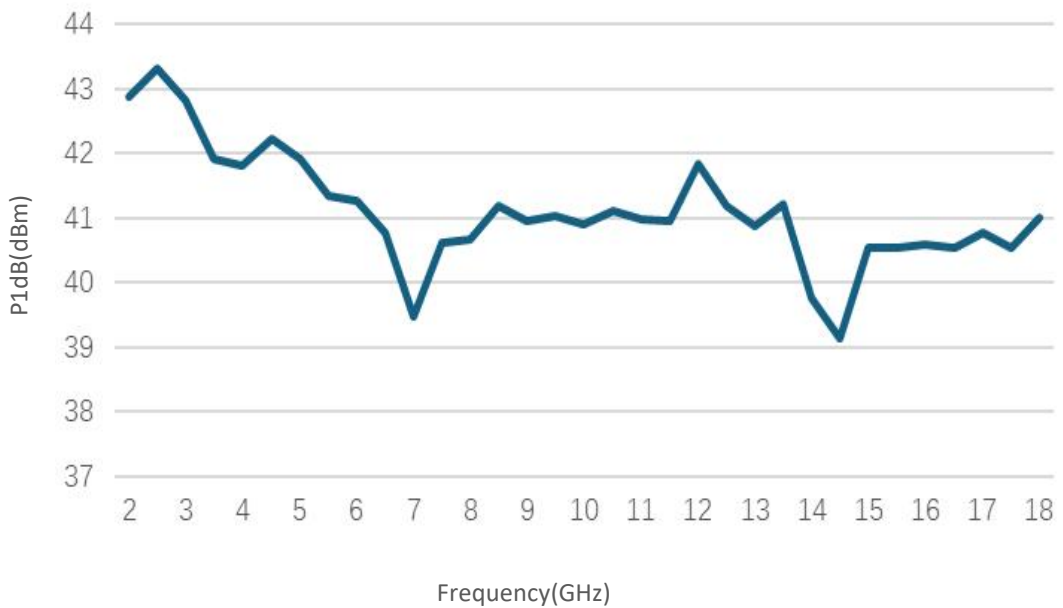

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.



Typical Performance Data:

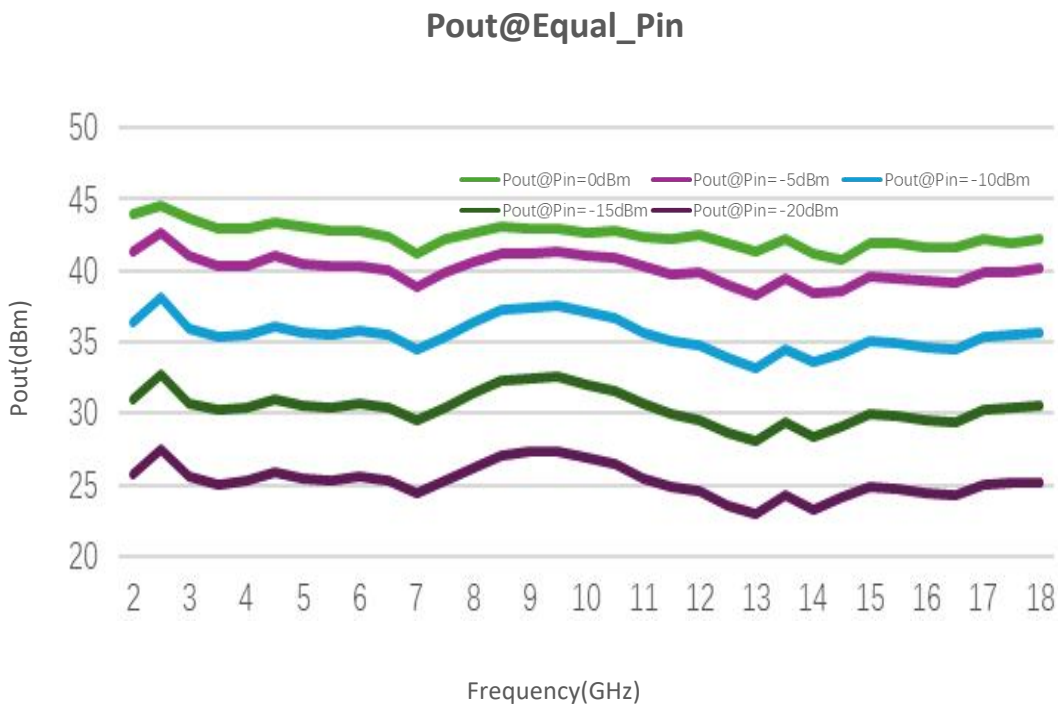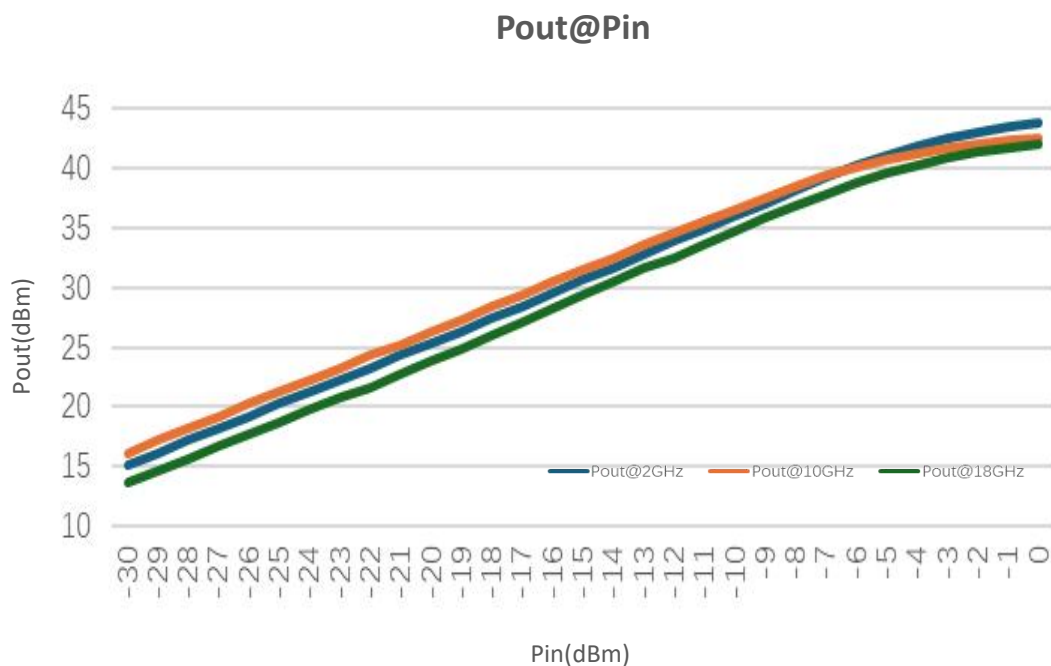


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

Spurious vs Frequency

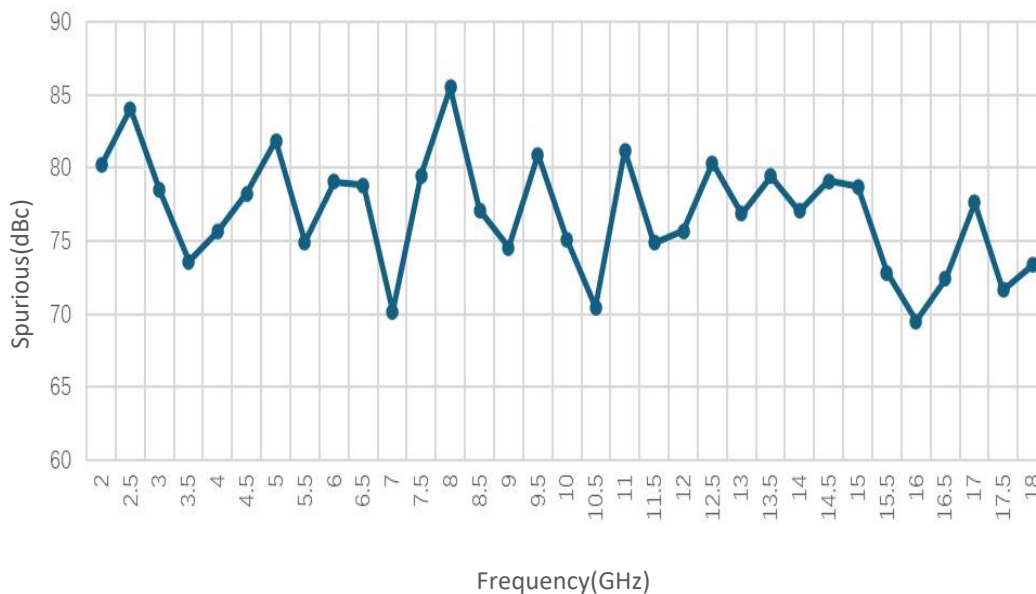

Harmonic vs Frequency

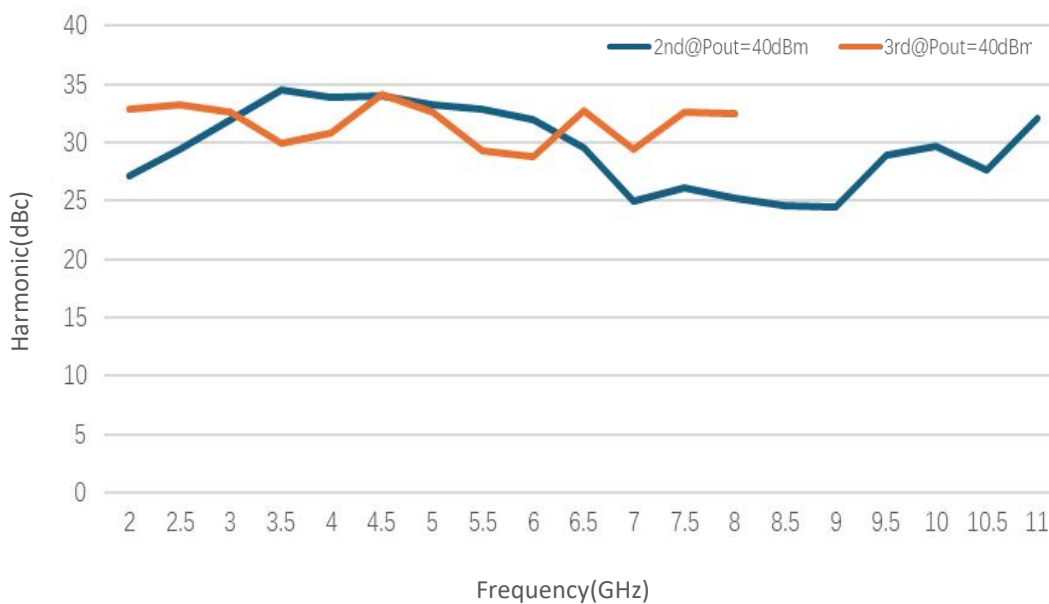

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.