



Power Amplifier

Model: PA-2G-22G-3

2-22GHz 3W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 2-22GHz
- High output power at saturation, 3W Min.
- High gain, 35 dB Min.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-2G-22G-3 is a power amplifier with a minimum power gain of 35 dB and a minimum Psat of 3W across the frequency range of 2 to 22 GHz. The DC power requirement for the amplifier is +18 VDC/4 A. The input and output port configuration offers coax adapter structure with 2.92mm female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	2		22	GHz
Power Gain	35			dB
Power Gain Flatness		±4		dB
Output P1dB		28		dBm
Output Psat	35			dBm
Spurious@Pout=35dBm			-50	dBc
Harmonic@Pout=35dBm			-10	dBc
Input VSWR			2	:1
DC Voltage		+18	+19	V DC
DC Supply Current		4	5	A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-40°C to +60°C	
Non-operating Temperature*	-50°C to +70°C	
Relative humidity	95	%
RF Input/Output Connector	2.92mm Female/2.92mm Female	
DC Supply Connector	J30J-15ZKP	Pin1~8:+18V Pin9~15:GND
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	150*90*20(Without heatsink) 150*90*66.5(With heatsink)	mm
Weight	≤2.5	Kg

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+19 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-2G-22G-3

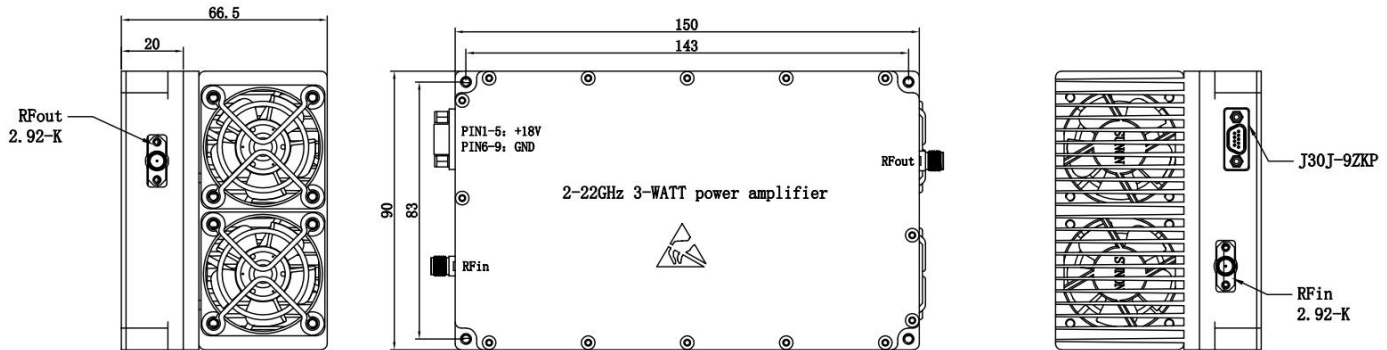

Ordering Information:

Base Number	Description	Optional
PA-2G-22G-3	Power Amplifier, 2-22GHz, Gain:35dB,Psat:3W,+18V DC	With Heatsink