



Power Amplifier

Model: PA-6G-18G-10

6-18GHz 10W CW

Ultrabroad frequency range, high performance and exceptional RF characteristics

Features:

- Frequency range: 6-18GHz
- High output power at saturation, 10W Typ.
- High gain, 40 dB Typ.
- 50 Ohm Matched Input / Output.

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Product Overview:

The PA-6G-18G-10 is a power amplifier with a typical small signal gain of 40 dB and a nominal P_{sat} of 10W across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +30 VDC/1.67 A. The input and output port configuration offers coax adapter structure with SMA female.



Electrical Specifications at 25°C:

Parameter	Min	Typ	Max	Units
Frequency range	6		18	GHz
Small Signal Gain		40		dB
Small Signal Gain Flatness		±1.5		dB
Output P1dB		38		dBm
Output Psat		40		dBm
Harmonic			-15	dBc
Input VSWR			2	:1
DC Voltage		30		V DC
DC Supply Current		1.67		A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Notes
Operating Temperature*	-40°C to +60°C	
Non-operating Temperature*	-50°C to +70°C	
Relative humidity	95	%
RF Input/Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Altitude	10,000	feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis	
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions	
Dimensions W x H x D	60*100*12 (Without heatsink) 100*200*56(With heatsink)	mm

*Note: For a wider temperature range, please consult the manufacturer.

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+31 V
RF Input Power	+20 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

PA-6G-18G-10-HS

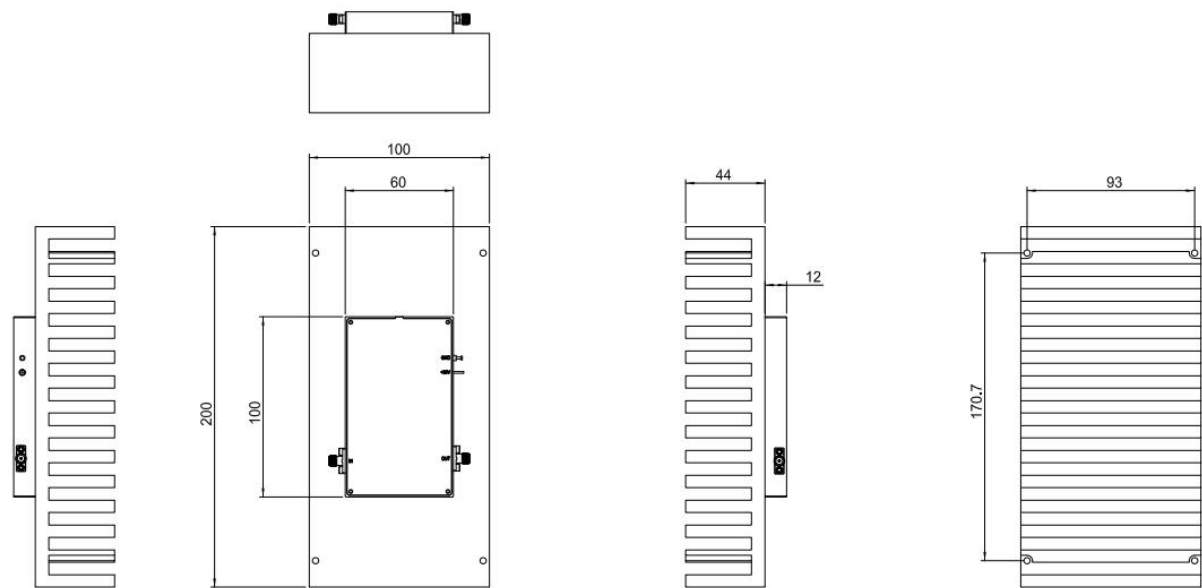


Ordering Information:

Base Number	Description	Optional
PA-6G-18G-10	Power Amplifier, 6-18GHz, Gain:40dB,Psat:10W,+30V DC	Without Heatsink
PA-6G-18G-10-HS	Power Amplifier, 6-18GHz, Gain:40dB,Psat:10W,+30V DC	With Heatsink




Typical Performance Data:

Input VSWR vs Frequency

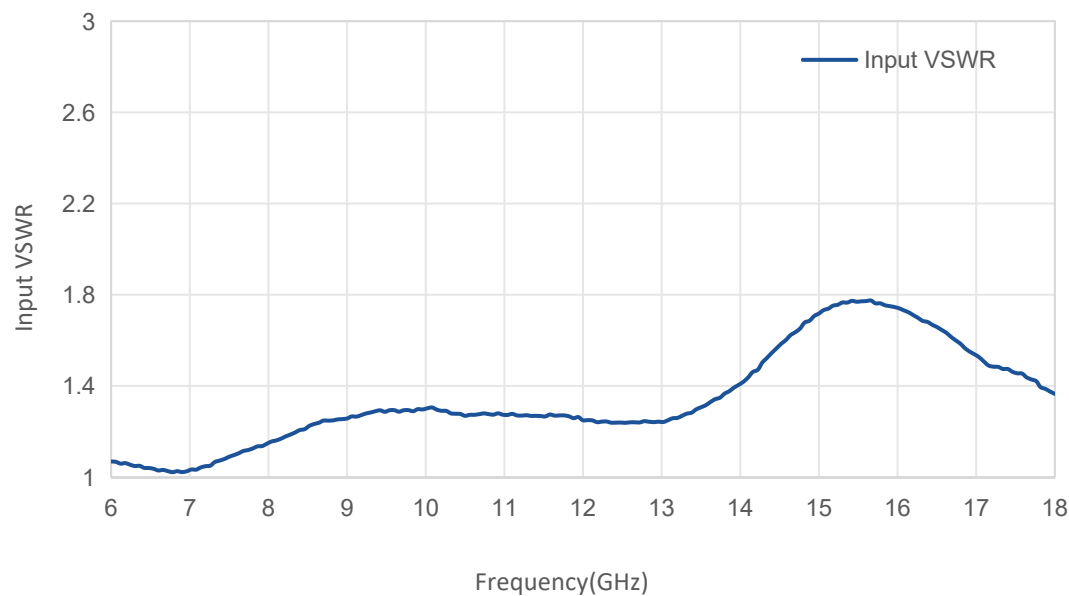

Small Signal Gain vs Frequency

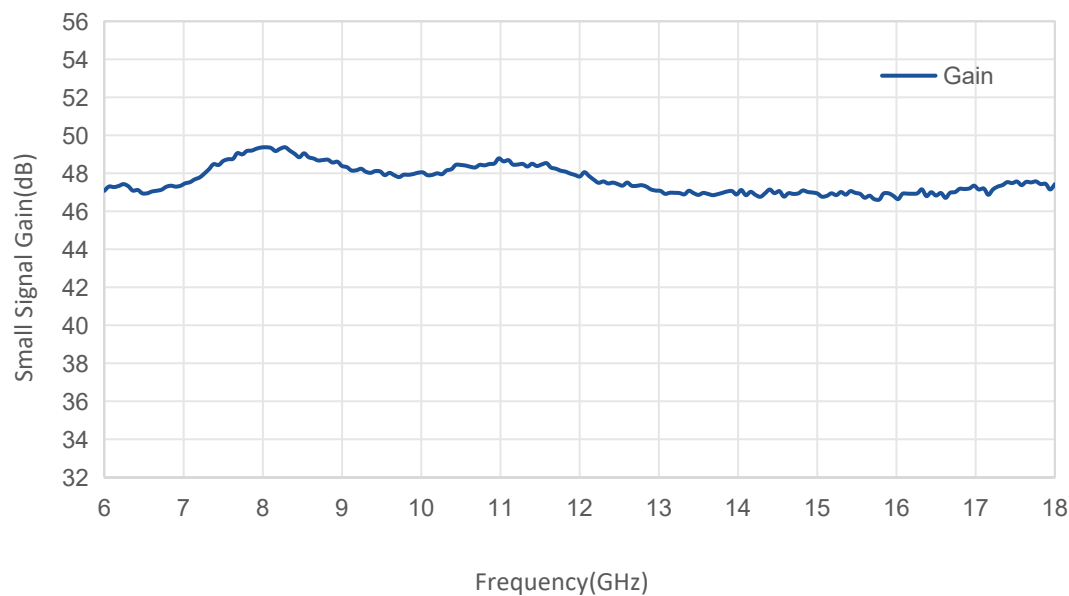


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.




Typical Performance Data:

P1dB vs Frequency

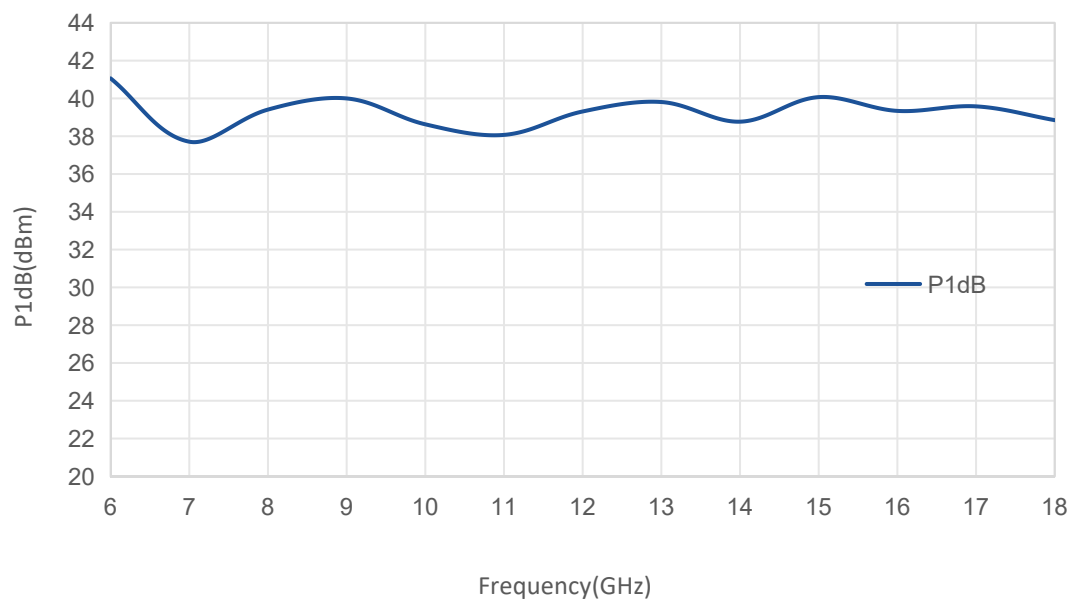

Psat vs Frequency

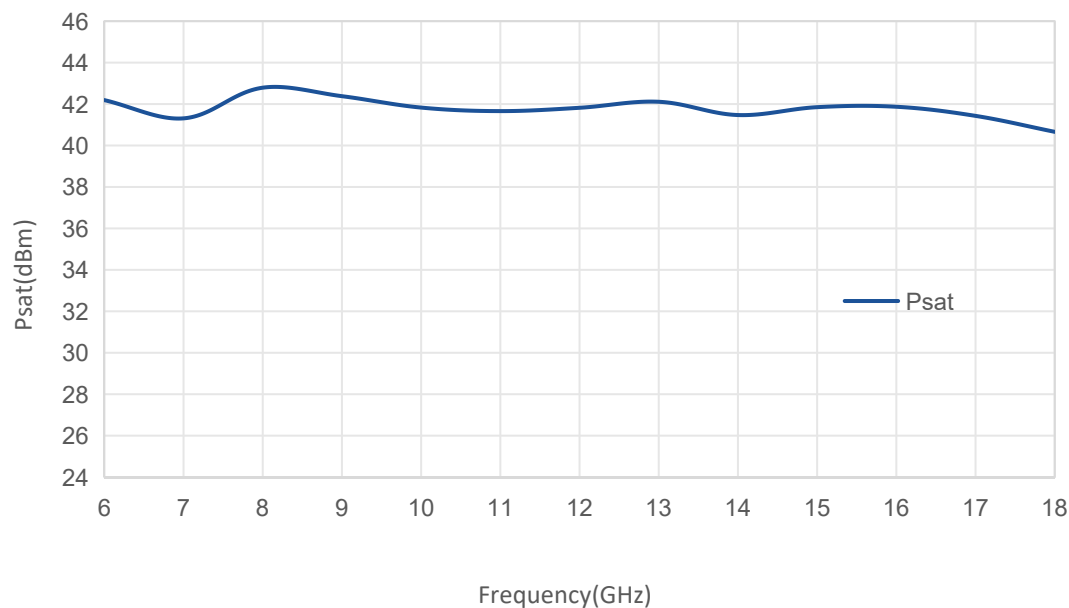


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.



Typical Performance Data:

Harmonic vs Frequency

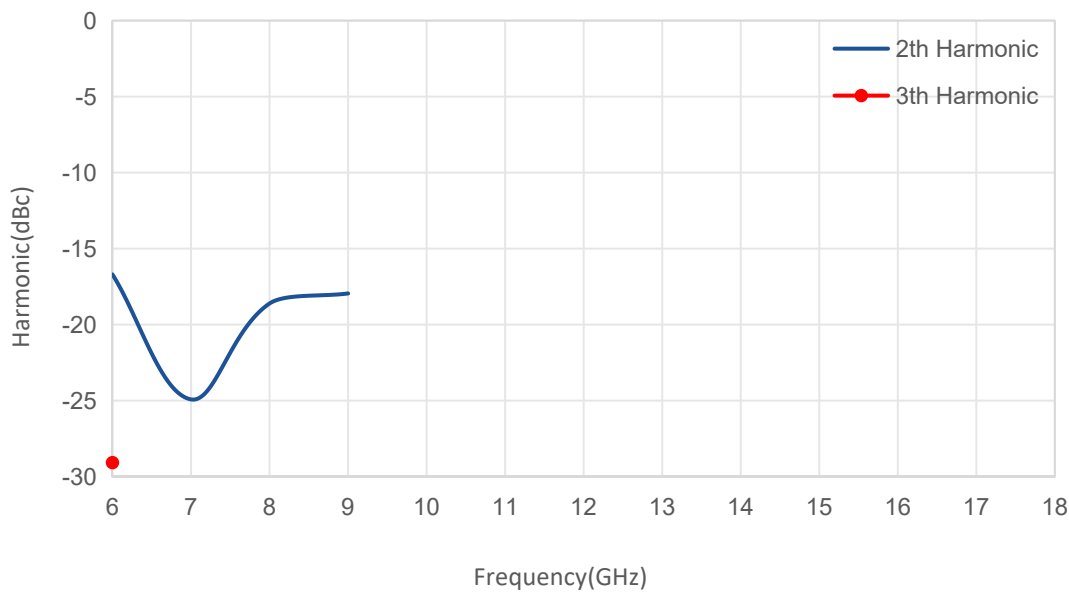

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.